



by **Schneider** Electric

IBEPLMT-E

Environmental Pole Mount



Installation Manual

Important Notices

For more information about Pelco's product-specific important notices and thereto related information, refer to www.pelco.com/legal.

REGULATORY NOTICES

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radio and Television Interference

This equipment has been tested and found to comply with the limits of a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Changes and modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Federal Communications Commission's rules.

CAN ICES-3(A)/NMB-3(A).

KOREAN CLASS A EMC

이 기기는 업무용 (A 급) 전자파 적합기기로서 판매자 또는 사용자는 이 점을 주의하시길 바라며, 가정 외의 지역에서 사용하는 것을 목적으로 합니다.

WARRANTY STATEMENT

For information about Pelco's product warranty and thereto related information, refer to www.pelco.com/warranty.

UL Safety Notices

This product is intended to be supplied by a Listed Power Unit marked "L.P.S." (or "Limited Power Source") and rate output 24Vac, 50/60Hz, 1.28 minimum or 48 Vdc, 0.35A minimum.

The product shall be installed by a qualified service person and the installation shall conform to local codes.

POLE MOUNT: INSTALLATION WITH ENVIRONMENTAL (IBEPLMT-E) POLE MOUNT

Supplied Parts List

Qty	Description
1	Pole mount junction box
5	M4 x 12mm machine screws
2	Stainless steel rings


NOTE: The supplied stainless steel rings apply to poles with the diameter from 70 to 180mm.

User-Supplied Parts List


Qty	Description
1	Bullet camera
1	Ethernet cable
1	Power cable (necessary if PoE is not available)
1	Alarm cable (optional)
1	Audio cable (optional)
1	Phillips and flathead screwdriver

Installation Guide

1. Loosen the two screws in the photo below and detach the pole mount junction box cover.

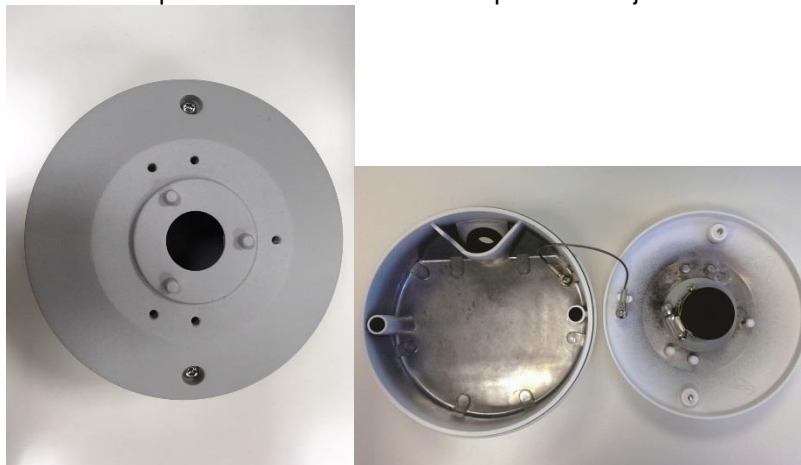

2. Remove the internal rubber plug from the cable entry hole of the pole mount junction box cover.

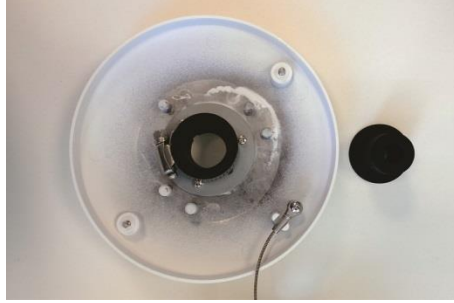


3. Thread the connectors of the All-In-One cable of the camera one by one through the cable entry hole.




4. Insert the rubber plug back to the cable entry hole and use a flathead screwdriver to tighten the stainless steel ring by turning the knob clockwise. Make sure there's no gap between the All-In-One cable and cable entry hole.



5. Connect the required cables (e.g. Ethernet cable) (#1 and #2 in the picture below) to the connectors of the All-In-One cable.

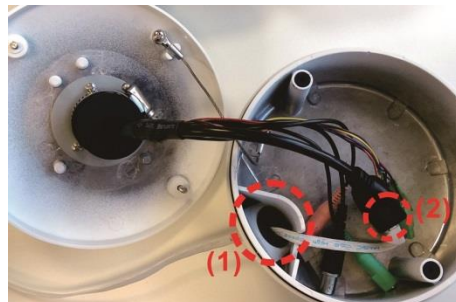


6. Arrange the All-In-One cable neatly.
7. Adjust the position of pole mount junction box cover properly and fasten the two screws to tighten the cover.

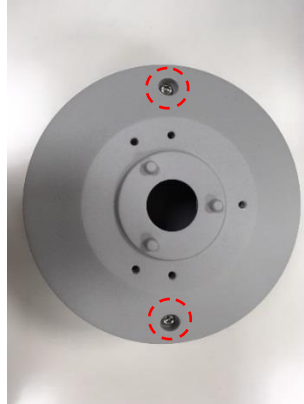

NOTE: When securing the pole mount junction box cover, you **must** align the two arrow marks with each other to ensure the cover is properly fixed.



8. Align the two screw holes of the camera with the screw holes on the pole mount junction box cover and fasten the camera with the M4 machine screws. The drainage hole should point down when installing horizontally.

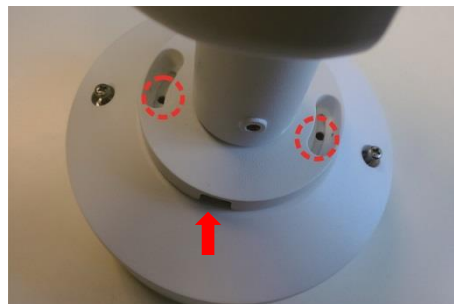

9. Loosen the knobs on the stainless steel rings by turning them counterclockwise with a flathead screwdriver.



Pelco Troubleshooting Contact Information

If the instructions provided fail to solve your problem, contact Pelco Product Support at 1-800-289-9100 (USA and Canada) or +1-559-292-1981 (international) for assistance. Be sure to have the serial number available when calling.

Do not try to repair the unit yourself. Leave maintenance and repairs to qualified technical personnel only.



Pelco by Schneider Electric

3500 Pelco Way Clovis, California 93612 USA

(800) 289-9100 Tel (800) 289-9150 Fax

+1 (559) 292-1981 International Tel

+1 (559) 348-1120 International Fax

www.pelco.com

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. ONVIF and the ONVIF logo are trademarks of ONVIF Inc. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice.

© Copyright 2016, Pelco, Inc.
All rights reserved.