



garland  
cables

pro series

Industrial / Power / Data / Security / Fibre


Garland's Pro Series range is the experts' choice for high quality cables.

Figure 8 Cable


### Part No: TCW24BKWHPE

Description	Stranded 19AWG (24/0.2mm) PACW, Figure 8 construction, PE Insulation.
Applicable Standards	AS/CA S-008
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

#### Cable Construction Drawing

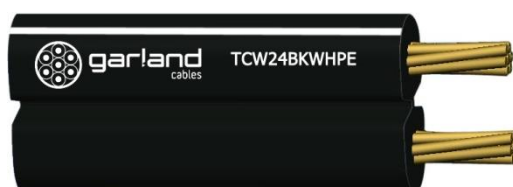

#### Cable Construction Relative Parts

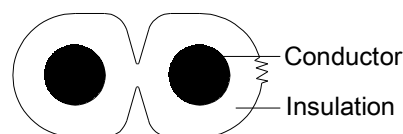

#### Cable Description

Conductor	AWG	Stranding	Area(mm <sup>2</sup> )	Diameter(mm)	Material
	19	24/0.2	0.75	1.13	PACW
Insulation	Cores : 2		Material : PE		
	Material : PE		Colour : Black/White Stripe (Signal Black RAL 9004)		
	Nominal Thickness (mm) : 0.75		Nominal OD (mm) : 2.7 x 5.4		

#### Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	27.5Ω/km
Min. Insulation Resistance @ 20°C	50MΩ.km

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
www.madisontech.com.au/garland

made by





garland  
cables


pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Voltage Test: Conductor to core 1.5 kV ac/1min

### Mechanical Properties

Operating Temperature Range	-25 to 70°C
Max. Recommended Pulling Tension	105N
Min. Bend Radius (install)	27mm
Approximate Mass	2.18kg/100m
Sheath Printing	V97215  GARLAND FIGURE 8 TCW24PE - 2 X 24/0.2

### Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W26 x H21.8cm	1R	

Document Change Record	Issue	Date	Prepared by	Approved By
	01	05-12-2012	LLS	Pent
Change History	Issue	Change		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99  
[www.madisontech.com.au/garland](http://www.madisontech.com.au/garland)

made by

