



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Figure 8 Cable


Part No: TCW24WHBK500HF

Description	Stranded 19AWG (24/0.2mm) PACW, Figure 8 construction, LSHF Insulation.
Applicable Standards	AS/CA S-008, AS 1049
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing



Cable Construction Relative Parts

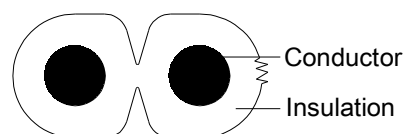

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	19	24/0.2	0.75	1.13	PACW
Insulation	Cores : 2		Material : LSHF		
	Material :		Colour : White/Black Strip		
	Nominal Thickness (mm) :		Nominal OD (mm) : 2.7 x 5.4		

Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	27.5Ω/km
Min. Insulation Resistance @ 20°C	50MΩ/km

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Voltage Test: Conductor to core 1.5 kV ac/1min


Mechanical Properties

Operating Temperature Range -25 to 90°C

Max. Recommended Pulling Tension 105N

Min. Bend Radius (install) 27mm

Approximate Mass 2.78kg/100m

Sheath Printing V97215  GARLAND FIGURE 8 TCW24HF - 2 X 24/0.2 LSZH

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W26 x H21.8cm	1R	

Document Change Record	Issue	Date	Prepared by	Approved By
	01	06-12-2012	LLS	Pent
Change History	Issue	Change		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

made by



madison