
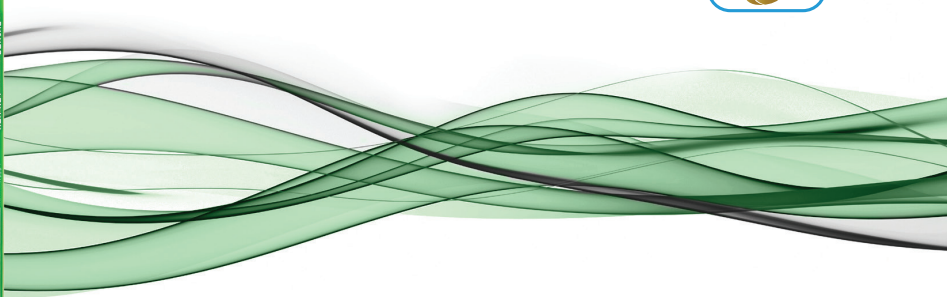


Digiplex EVO

High Security and Access System

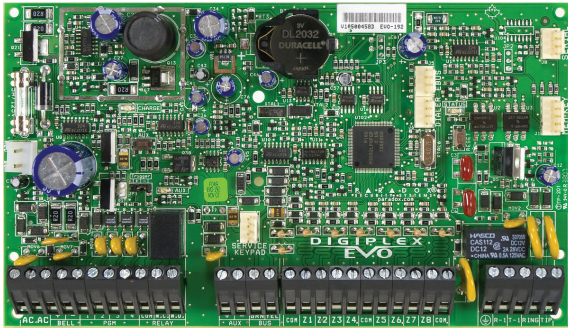

Description

Digiplex EVO systems (EVO192) provide the highest level of protection for banks, government sites, luxurious residential homes and any place where maximum security is essential. The modular concept of these systems provide installers with labour-saving features that make expanding, installing and servicing these systems quick and convenient.

Expand your system by adding expansion modules anywhere, in any combination, on the 4-wire combus. Modules are connected to the combus at the most convenient location and their zone inputs are assigned to the desired zone and partition. Keyswitches, remote controls, and unused module inputs do not use zones. Once installed, all combus modules (including motion detectors) can be programmed remotely via a keypad, or the BabyWare PC software.

Digiplex EVO integrates access control solutions. Your alarm system user database can be used to manage the access for up to 32 doors, and the monitoring of these doors can be included in any partition. By merging security and access control, Digiplex EVO systems increase the level of protection offered by security systems to a whole new level.


Feature Comparison

| Feature | EVO192 |
|---|------------------|
| Maximum Zones* | 192 |
| On-board Zones | 8 (16 with ATZ) |
| Partitions | 8 |
| User Codes | 999 |
| Multibus | ✓ |
| Stay Arming | ✓ |
| Panel In-field Firmware Upgradable | ✓ |
| Access Control (Doors) | 32 |
| Access Levels / Schedules | 16 / 32 |
| Events Buffered | 3584 |
| PGMs | 32 (5 on-board) |
| PGM +/- Trigger | ✓ |
| Virtual Zones** | 32 |
| Expansion Modules* | 254 |
| Supports IP / GPRS / GSM Communication (PCS Series) | ✓ |
| Supports VDMP3 Plug-in Voice Module | ✓ |
| Supports IP150 Internet Module | ✓ |
| Software | NEware, BabyWare |
| Listen-in Capabilities | ✓ |

* Can be any combination of hardwire, wireless or addressable zones, or modules
 ** Automate PGM activations without occupying security zones



System Overview

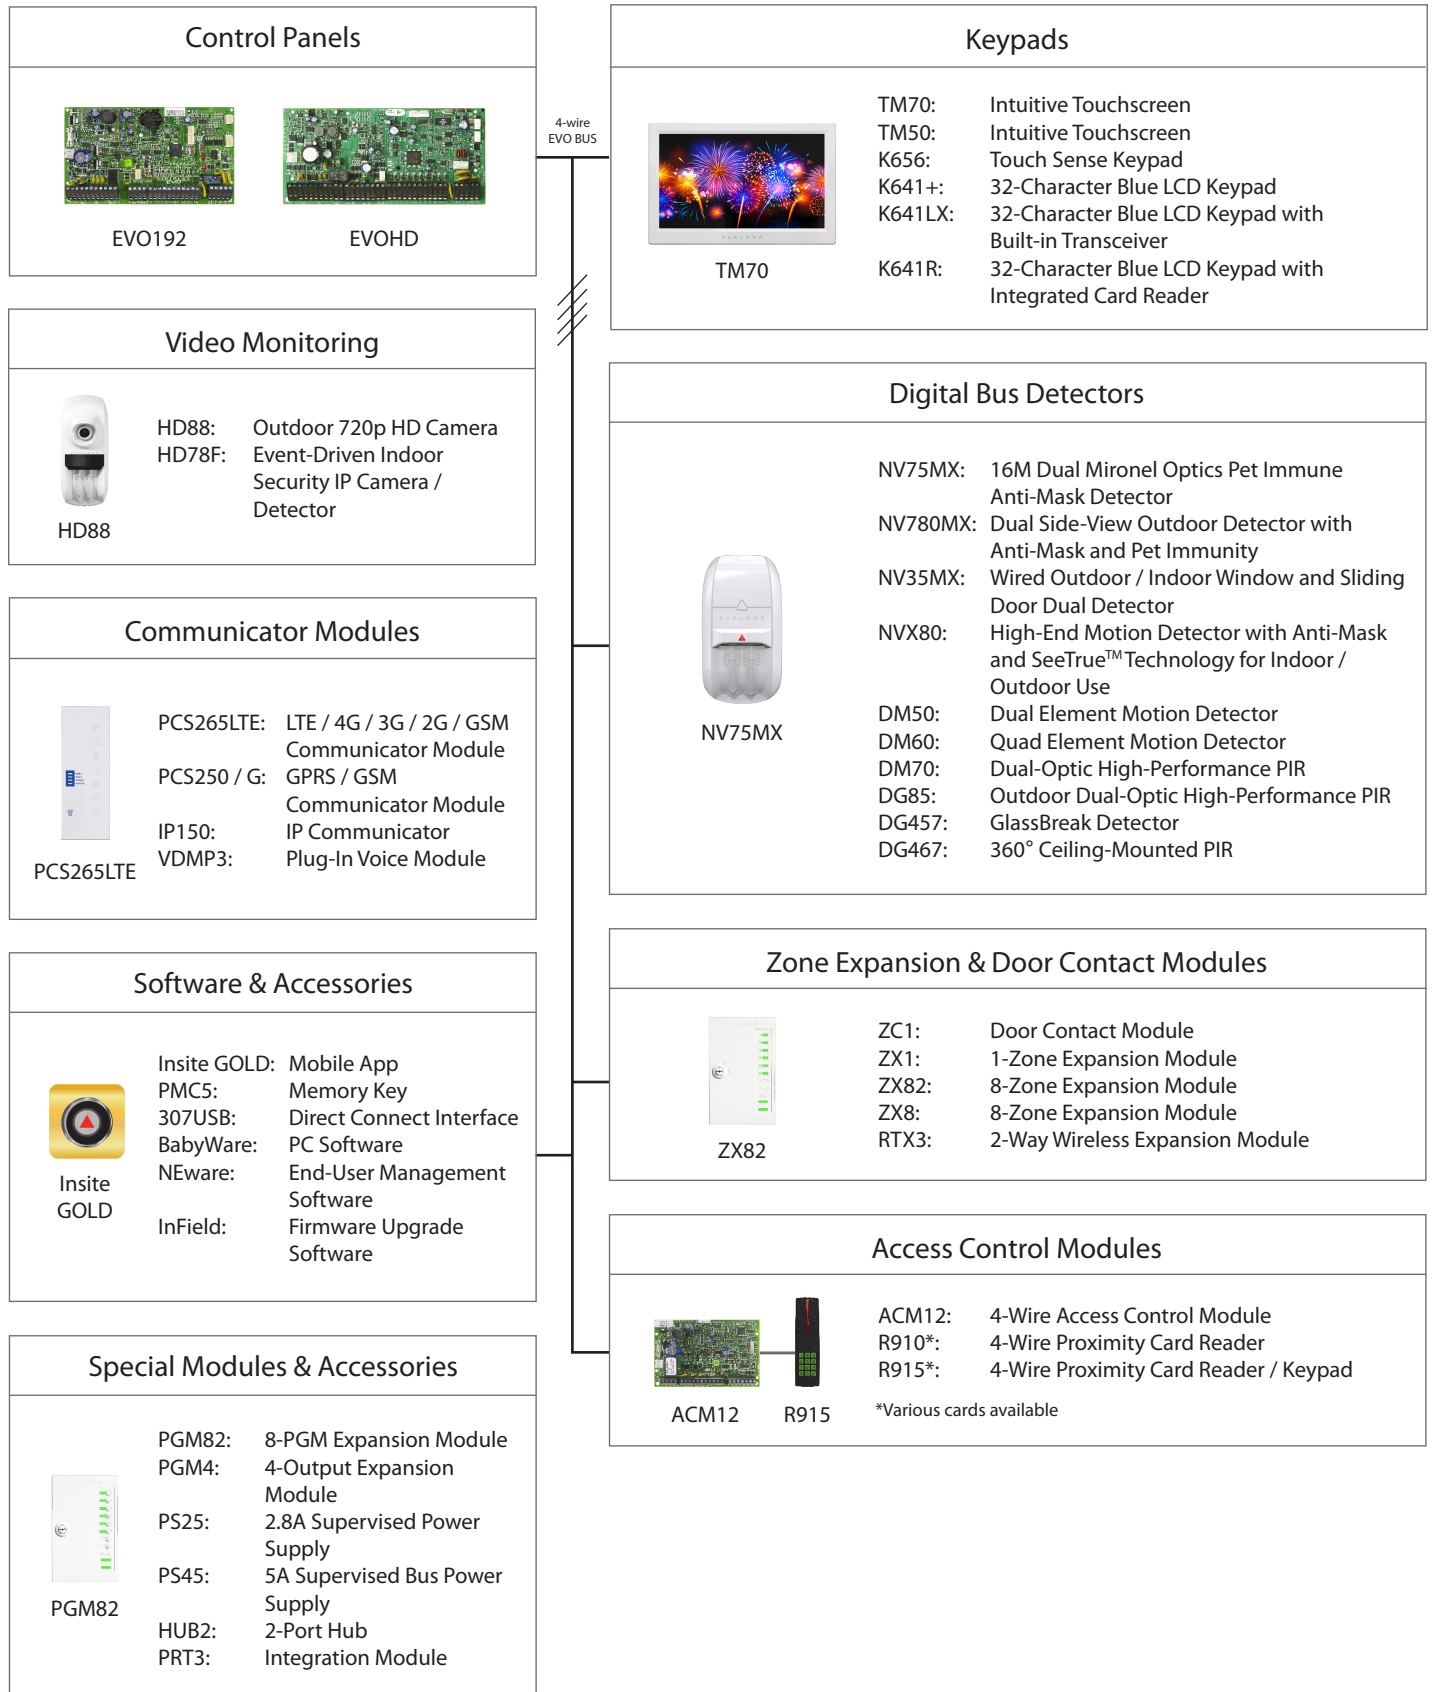

Feature Details



Internet Communication (IP150)

The IP150 Internet Module allows you to control and monitor your security system remotely through any web browser. It allows for email notifications of important system events such as alarms, arm/disarm events, and troubles. For example, receive an email at work when your kids get back from school. You can also view the live status of your system and arm/disarm it. For example, you have just left your office for the weekend but are not sure you remembered to arm the system. Simply check the status of your system from a laptop and arm it.



Wireless Communication (PCS Series)

The PCS series modules provide the Digiplex EVO control panels with wireless communication capabilities to report system events via IP, GPRS, and/or GSM. Whether it be uploading/downloading via IP or GPRS, receiving system status and events by voice or text message, or reporting to the monitoring station via IP, GPRS, or GSM, the PCS series enhances the communication capabilities of any Digiplex EVO installation.



Voice Communication (VDMP3)

The VDMP3 is a plug-in, voice-assisted module that can be programmed to call up to 5 telephone numbers in the event of an alarm. For example, when an alarm occurs at your store during off-hours, every employee can receive notification via telephone; e.g., "Area 1 in alarm. Zone 3. Press 1 to disarm the system..." You can also call the VDMP3 from an outside line, enabling you to arm or disarm the system as well as activate PGMs. The VDMP3 essentially turns any outside telephone into a keypad. The VDMP3 is easy to install; plug it in directly onto the panel, set the phone numbers, and select the activation event.



In-field Upgradable

Digiplex EVO is not only easy to install, but is also fully in-field upgradable for simple on-site updates. The process is effortless; connect the PC to the panel and you are a few clicks away from performing a complete system upgrade within minutes. No need to change panels or hardware; all the updates are done using Paradox's InField Firmware Upgrade Software.



Access Control


Access control can be added to the Digiplex EVO system to provide additional control over who has access to your premises, even when your security system is not armed and you are not there to supervise. With added access control you can limit access to certain areas, disallow access to others, or control entire groups of people according to their schedule or privileges. Make your premises inadmissible to all except those with access cards, track anybody who enters your premises, print detailed reports of access control activities, and more.



App-based System Control

The Insite GOLD app enables you to remotely access your Paradox security system and view your system cameras. Insite GOLD provides lots of functionality and information at one's fingertip. It has an intuitive user-interface which enables you to easily connect to your security system and edit its settings. Now you can control your Paradox security system from any Android / iOS smartphone.

TM70 Overview

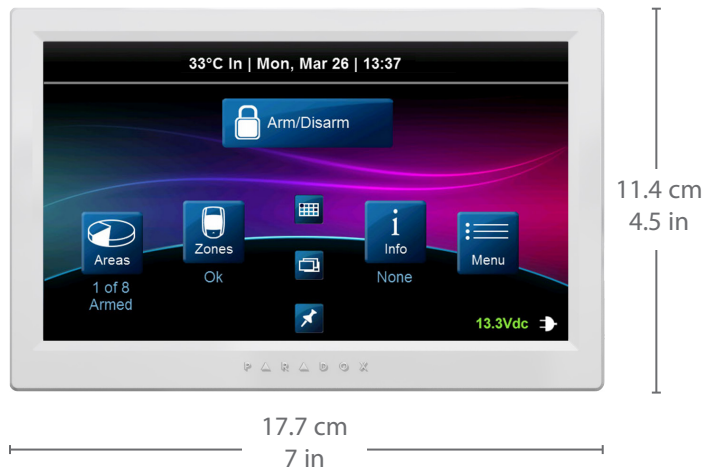

TM70: Intuitive Touchscreen

- ## SpotOn Locator™

Upload photos, images, or schematics to eliminate the need for deciphering LED zone lights. These images display any door, window, or motion detector that are active. Since the images are uploaded by the user, they are truly customized, and can be unique to each installation. SpotOn Locator™ is integrated in the original firmware, and when purchased, is unlocked with an authorization code.

- ## OneScreen Monitoring™

Provides a real-time visual display of the system's status on one screen. It allows the user to choose which partitions will be displayed showing arming level, alarm, ready, and troubles. It also displays zone statuses; open, close, bypass, alarm, and tamper. OneScreen Monitoring™ also features Solo Test™ mode, which allows installers and users to easily test all system zone's via the TM70 Touch's screen. OneScreen Monitoring™ is integrated in the original firmware, and when purchased, is unlocked with an authorization code.

Specifications

| | |
|-----------------------|--|
| Display | 16-bit, color LCD; 8.6 x 15.4 cm (3.1 x 5.9 in.), 800 x 480 pixels |
| Input Voltage | 9 to 15 Vdc |
| Current Consumption | 250 mA at max brightness + 80 mA sounder |
| Keypad Zone Input | 1 for a detector or external temperature sensor |
| Tamper | Built-in, cover and wall |
| Humidity | 5 to 90% |
| Operating Temperature | -10 to 55 °C (14 to 131 °F) |
| Compatibility | Swan, EVO, Spectra, Magellan |

Note: All control panel outputs are rated to operate between 11.4 Vdc and 12.5 Vdc.



Specifications PRX278000033-P2C

The PRX278000033-P2C is a metal box enclosure for provision multiple module and panel mounting.

Features:

- Many punch-out holes for simple wiring
- Easy door removal
- Sizes: 28cm X 28cm X 7.6cm (11" x11" x 3")

P ▲ R ▲ D O X™



Specifications PRXK-TK278

The PRXK-TK278 is a BOM Kit for 1x tamper switch PRX2502302000-P2C and 1x tamper bracket PRX2781030000-P2C to suit with Paradox Metal Box Enclosure PRX2780000033-P2C; to protects against tampering (opening door or removal from wall).



P ▲ R ▲ D O X™



DIGI PLEX EVO

EVO48
EVO192

User Guide

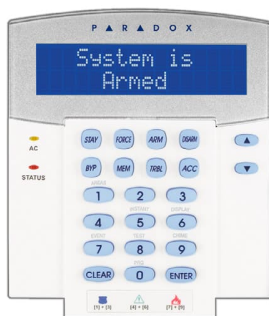

P ▲ R ▲ D O X™

NV5


High-Performance Digital Infrared Motion Detector

Description

The NV5 is the entry-level motion detector from Paradox's ENVY line of next generation motion detection. Featuring advanced processing technology, optical technology, and easy installation, the NV5 represents state of the art technology with the most advanced and innovative digital infrared detector of its class.

The NV5 features Paradox's developed optics - a Hybrid Cylindrical / Spherical combination 1.0 inch lens with 3rd generation 3D Lodiff® Fresnel segments- the first and most advanced lens in the detection industry. This combination offers the best detection possible for passive infrared energy reception optimized for far beams (cylindrical) and medium/close beams (spherical). This lens also features Paradox's "Equalized" detection pattern, ensuring equal sensitivity throughout the protected area. Furthermore, the NV5 offers Small Pet Resistance or, alternatively, a Super Creep Zone Mirror add-on optics, which provides superior detection directly below the detector (see Beam Pattern).

The NV5 offers Auto Pulse Signal Processing with two levels of RF rejection, dual or single edge processing, and LED feedback for each setting. With precision and equalized detection, superior detector stability, total area coverage, and complete false alarm protection, the NV5 is the most advanced and innovative digital infrared detector in its class.

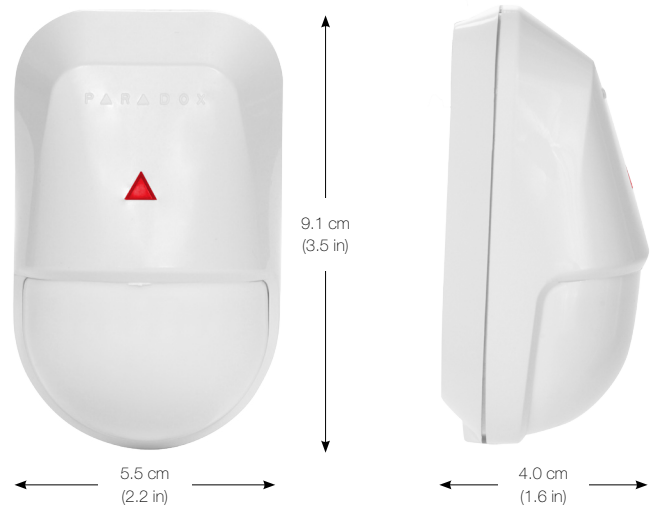

Features

- Infrared motion detector managed by Full Authority Digital Electronics Control (FADEC)
- Paradox's Hybrid Cylindrical-Spherical 1.0 inch lens with 3rd generation 3D Lodiff® Fresnel segments- 10 x 10 m (32.8 x 32.8 ft), 90° viewing angle, and 0.5 m (1.6 ft) to max range (no dead zone beam pattern)
- Paradox's equalized detection pattern - ensures equal sensitivity throughout the protected area
- Paradox Super Creep down-looking beam optic option for straight down detection
- Pet Resistance up to 16 kg (35 lb)
- Dual/Single Edge Processing selection - the only one in its class
- Paradox patented Auto Pulse Signal Processing (APSP) with settings for normal or high interference environments
- Digitally equalized temperature compensation; unit performance specifically tailored to obtain same catch capability at all specified operating temperatures
- Digital Sensitivity trimmer adjustment with five range levels and LED feedback, allows for perfect unit adjustment for all room sizes
- Optional wall/ceiling mount bracket
- Miniature yet easy to install with no PCB removal or adjustment
- CE and EN50131 Grade 2 approved (see PARADOX.com for latest approval updates)
- Interchangeable lenses; 90° standard lens

ENVY
SERIES

PARADOX
DIGITAL
DETECTION

PET
IMMUNITY

Advanced Digital Technology (FADEC)


The NV5's digital analysis and algorithms ensure precise and accurate detection performance, managed by Full Authority Digital Electronics Control (FADEC). Depending on the environment application, the NV5 can be easily configured with its unique pre-programmed profile settings (Normal, Moderate, Pet Resistant, and Harsh).

- High-resolution and full-dynamic range digital signal conversion
- High-speed, advanced algorithm, digital signal processing
- Digital EMI / RFI interference rejection
- Five choices of digital range levels (via trimpot)

Advanced Optical Technology

Paradox's Hybrid Cylindrical-Spherical combination offers the best detection possible for passive infrared energy reception for far beams (1. Cylindrical) and medium/close beams (2. Spherical). This lens design allows for ultimate perpendicular beam collection. Superior and uniform energy collection translates to a better image quality of the target which provides unmatched detection accuracy and stability.


- 3rd generation 3D LoDiff® Fresnel segments
- Optically and digitally equalized beam pattern (all beams optimized for generating equal signal level at any distance or angle)
- Optional Super Creep Zone or Pet Resistance up to 16 kg (35 lb)

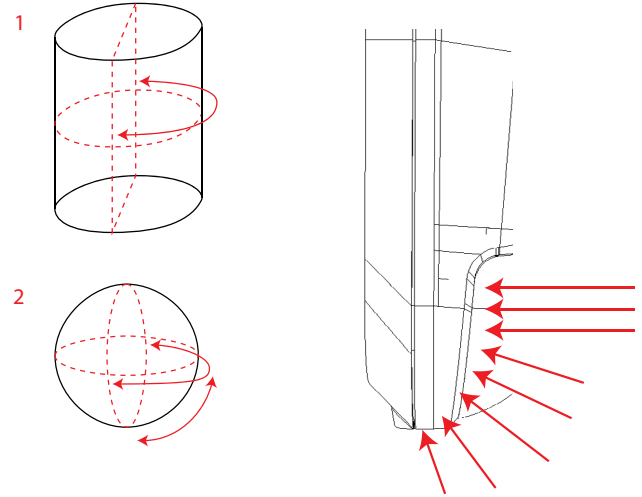

Technical Specifications

| | |
|-------------------------|--|
| Installation height | 2.1 m – 3.1 m (7.0 ft – 10.2 ft) For 10 m and above range, unit must be installed at 2.1 m (7.0 ft) height and above |
| Sensor | Dual rectangular element, low noise, high sensitivity, EMI immunity |
| Lens | Hybrid Cylindrical Spherical 3 rd gen. Fresnel Lens, equal beam sensitivity (patent pending) |
| Processing | High resolution digital signal processing. Four profiles (Normal, Medium, Pet Res., Harsh), true digital temperature compensation. |
| Super Creep Zone | Add on mirror option for enhanced creep zone at 0.1 m from the wall (no Pet Resistance) |
| Range adjustment | 5 level range adjustments (50% to 150%) |
| Startup time | 10 seconds |
| Detection speed | 0.2 m/s to 3 m/s (0.6 ft/s to 9.8 ft/s) |
| Power input | 10 Vdc to 15 Vdc |
| Current consumption | 10.5 mA @ Standby / 11.3 mA @ Alarm |
| Coverage | 10 m (32.8 ft) x 90° 0.5 m (1.6 ft) down looking with optional creep zone |
| PET Resistance | Up to 16 kg (35 lb) |
| Alarm indicator | Red LED for 3 seconds |
| Alarm output | Solid State, N.C. 150 mA |
| Anti-tamper switch | N.C. 28 Vdc, 0.15 A |
| Operating temperature | -10°C to 50°C (14°F to 122 °F) |
| Humidity | 95% max. |
| Dimensions | 9.1 x 5.5 x 4 cm (3.5 x 2.2 x 1.6 in.) |
| RFI Immunity | 10 V/m 80 MHz to 2 GHz |
| Environmental standards | Complies with EN 50131 Security Grade 2 / Environmental Class I |

Beam Pattern

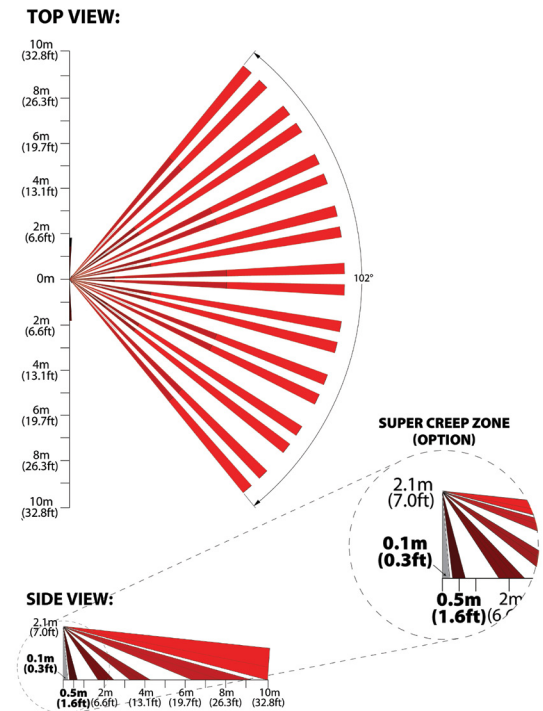

Wall/Ceiling Bracket

Wall Mount Bracket

Ceiling Mount Bracket





Specifications DFMWP16

The DFMWP16 is combo siren and strobe (slim design).

- New design
- Siren tone selectable for different applications
- Sound volume adjustable: low dB for testing and high dB for normal operation
- Bright: new LED strobe design
- Independent siren and strobe operation
- High quality UV treated case
- Weatherproof
- Front and back tampers
- EOLRs built in, suitable for most major alarm panels

Operating voltage: 9-15VDC

SPL @ 1meter: 110dB

Siren current draw: 150mA

Strobe current draw: 50mA

Siren tone selectable: Tone 1: warble; Tone 2: Hi/Lo

Dimension: 200 x 110 x 40mm





WP16 Combo Siren/Strobe

Voltage: 9-15VDC




Current: Max 150mA @ 12VDC

High Volume: 110±3 dB @ 1meter

Low Volume: 95±3 dB @ 1meter

Tone 1: Warble

Tone 2: Hi/Lo



+ Siren - Input + Strobe - Input + LED - Night Comfort Tamper Output Spare





Specifications DFMWP08

The DFMWP08 is indoor top hat piezo.

Input voltage: 12VDC

SPL @ 1meter: 105dB

Current draw: 90mA





VRLA 12V7AH

SA12V7

Specifications

| | | |
|----------------------------------|--|-------------------------------|
| Nominal Voltage | 12 V | |
| Nominal Capacity 20HR | 7.0 AH | |
| Dimensions | Length | 151±1mm (5.94 inches) |
| | Width | 65±1mm (2.56 inches) |
| | Container Height | 95±1mm (3.74 inches) |
| | Total Height (with terminal) | 100±1mm (3.94 inches) |
| Approx Weight | Approx 2.10 kg (4.63 lbs) | |
| Terminal | F1 | |
| Container Material | ABS Plastic | |
| Lead Material | Purity Lead 99.995% | |
| Sulfuric Acid | Distilled Sulfuric Acid (Zero metal content) | |
| Separator | AGM | |
| Rated Capacity | 7.00 AH/0.350A | (20hr, 1.80V/cell, 25°C/77°F) |
| | 6.53 AH/0.653A | (10hr, 1.80V/cell, 25°C/77°F) |
| | 6.00 AH/1.20A | (5hr, 1.75V/cell, 25°C/77°F) |
| | 5.37 AH/1.79A | (3hr, 1.75V/cell, 25°C/77°F) |
| | 4.55 AH/4.55A | (1hr, 1.60V/cell, 25°C/77°F) |
| Max. Discharge Current | 105A (5s) | |
| Internal Resistance | Approx 23mΩ | |
| Operating Temp.Range | Discharge | : -15 - 50°C (5 - 122°F) |
| | Charge | : 0 - 40°C (32 - 104°F) |
| | Storage | : -15 - 40°C (5 - 104°F) |
| Nominal Operating Temp.Range | 25±3°C (77±5°F) | |
| Cycle Use | Initial Charging Current less than 2.1A. Voltage 14.4V - 14.7V at 25°C (77°F) Temp.Coefficient -30mV/°C | |
| Standby Use | No limit on Initial Charging Current Voltage 13.5V - 13.8V at 25°C (77°F) Temp.Coefficient -20 mV/°C | |
| Capacity affected by Temperature | 40°C (104°F) 103% 25°C (77°F) 100% 0°C (32°F) 86% | |
| Self Discharge | Sentry AGM series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter. | |




Applications

- All purpose
- Standby Applications
- Recreation Vehicles
- Uninterruptible Power Supply (UPS)
- Electric Power System (EPS)
- Fire & Security
- Generators
- Medical Equipment

Dimensions

F1 Terminal

Unit: mm (inches)

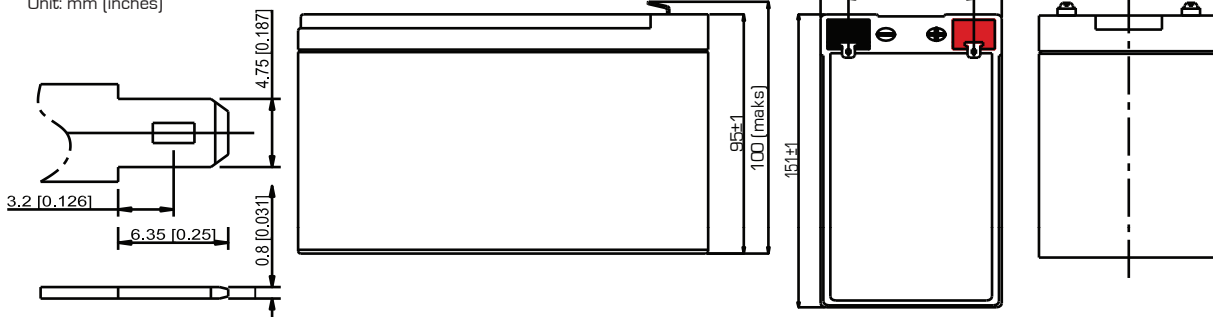


Constant Current Discharge (Amperes) at 25°C (77°F)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-------|-------|-------|
| 1.85V/cell | 18.0 | 12.8 | 10.48 | 8.79 | 6.53 | 4.79 | 3.86 | 2.29 | 1.69 | 1.36 | 1.14 | 0.98 | 0.774 | 0.640 | 0.345 |
| 1.80V/cell | 21.4 | 14.3 | 11.4 | 9.44 | 6.94 | 5.05 | 4.03 | 2.38 | 1.74 | 1.40 | 1.17 | 1.01 | 0.791 | 0.653 | 0.350 |
| 1.75V/cell | 24.2 | 15.6 | 12.2 | 10.0 | 7.29 | 5.27 | 4.18 | 2.45 | 1.79 | 1.43 | 1.20 | 1.03 | 0.805 | 0.663 | 0.357 |
| 1.70V/cell | 26.7 | 16.7 | 12.9 | 10.5 | 7.59 | 5.46 | 4.32 | 2.51 | 1.83 | 1.46 | 1.22 | 1.05 | 0.817 | 0.672 | 0.361 |
| 1.65V/cell | 28.8 | 17.7 | 13.5 | 10.9 | 7.86 | 5.62 | 4.46 | 2.57 | 1.86 | 1.48 | 1.23 | 1.06 | 0.826 | 0.680 | 0.365 |
| 1.60V/cell | 30.6 | 18.6 | 14.1 | 11.3 | 8.09 | 5.76 | 4.55 | 2.61 | 1.89 | 1.50 | 1.25 | 1.07 | 0.834 | 0.685 | 0.367 |


Constant Power Discharge (Watts/Cell) at 25°C (77°F)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-------|-------|-------|
| 1.85V/cell | 34.2 | 24.5 | 20.2 | 17.1 | 12.8 | 9.44 | 7.64 | 4.56 | 3.37 | 2.72 | 2.29 | 1.99 | 1.565 | 1.296 | 0.701 |
| 1.80V/cell | 40.2 | 27.2 | 21.9 | 18.3 | 13.5 | 9.91 | 7.96 | 4.72 | 3.47 | 2.79 | 2.34 | 2.03 | 1.593 | 1.318 | 0.708 |
| 1.75V/cell | 45.1 | 29.5 | 23.3 | 19.3 | 14.2 | 10.3 | 8.23 | 4.85 | 3.55 | 2.85 | 2.39 | 2.06 | 1.616 | 1.344 | 0.719 |
| 1.70V/cell | 49.2 | 31.3 | 24.5 | 20.1 | 14.7 | 10.6 | 8.48 | 4.96 | 3.62 | 2.89 | 2.42 | 2.09 | 1.633 | 1.347 | 0.725 |
| 1.65V/cell | 52.6 | 32.9 | 25.5 | 20.8 | 15.2 | 10.9 | 8.73 | 5.05 | 3.68 | 2.93 | 2.45 | 2.11 | 1.649 | 1.359 | 0.731 |
| 1.60V/cell | 55.5 | 34.3 | 26.3 | 21.5 | 15.5 | 11.2 | 8.88 | 5.12 | 3.72 | 2.96 | 2.47 | 2.13 | 1.660 | 1.367 | 0.734 |


Discharge Characteristics

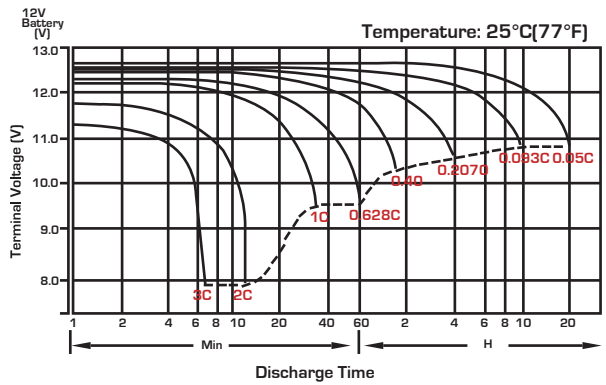


Float Charging Characteristics

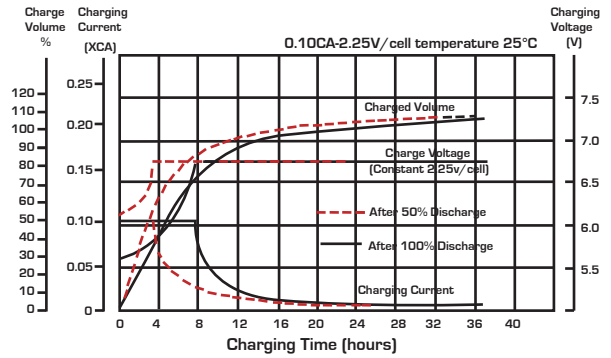


Temperature Effects in Relation to Battery Capacity

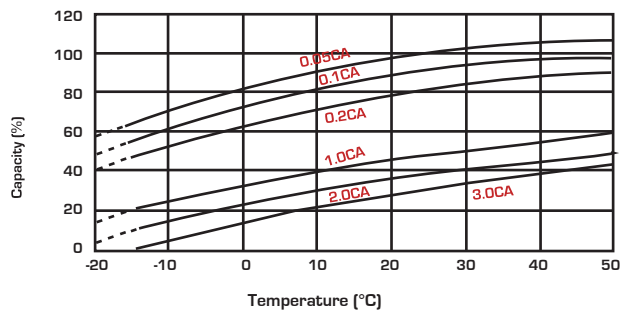


Effect of Temperature on Long Term Float Life

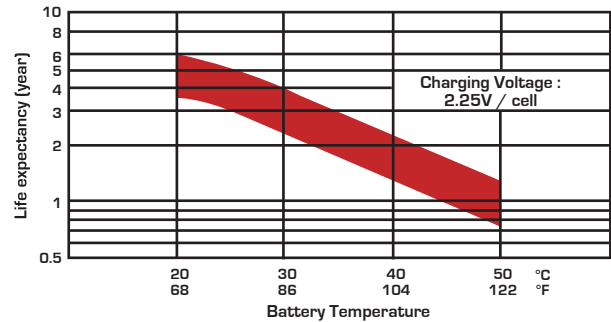

Cycle Life in Relation to Depth of Discharge

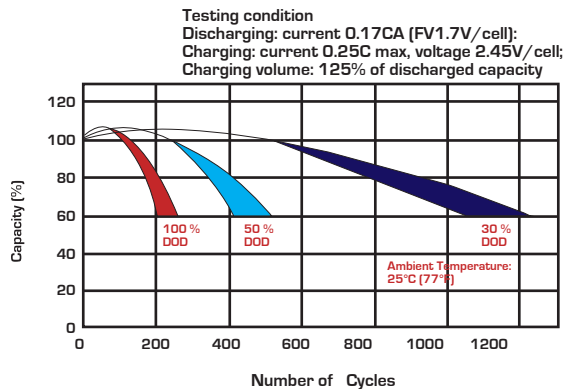

Self Discharge Characteristics

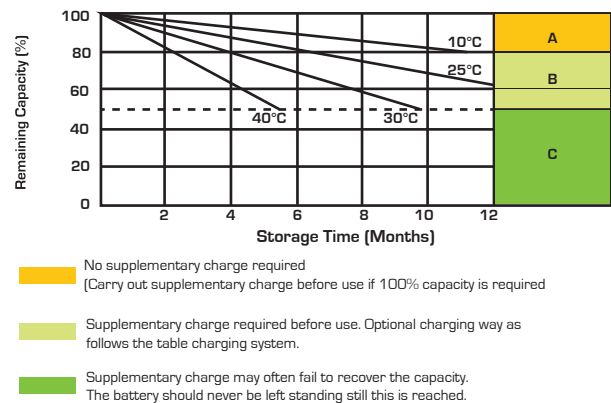

Charging System

| DOD | Current Limit (A) | Constant Voltage (V) | Fully Charged Time (h) |
|-----|---------------------|----------------------|------------------------|
| 20 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 10 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 8 |
| 50 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 15 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 12 |
| 80 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 16 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 14 |
| 100 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 20 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 18 |

State of Charge (SOC)

| Open Circuit Voltage (V/cell) | Open Circuit Voltage (12V/cell) | Open Circuit Voltage (6V/cell) | State of Charge (% of full charge capacity) |
|-------------------------------|---------------------------------|--------------------------------|---|
| 2.14-2.15 | 12.84-12.90 | 6.42-6.46 | 100 |
| 2.12-2.13 | 12.72-12.78 | 6.36-6.39 | 90 |
| 2.11 | 12.66 | 6.33 | 80 |
| 2.09 | 12.54 | 6.27 | 70 |
| 2.07 | 12.42 | 6.21 | 60 |
| 2.05 | 12.30 | 6.15 | 50 |




Sealed Performance Batteries

Domestic Sales | Ph: +61 (0)7 3386 1102 | Fax: +61 (0)7 3102 9913


sales@spb.net.au | www.sealedperformance.com.au

National Warehouse | 1 Ant Road | Yatala, Brisbane QLD 4207

Melbourne Office | 2/9 Compark Circuit | Mulgrave, Melbourne VIC 3170

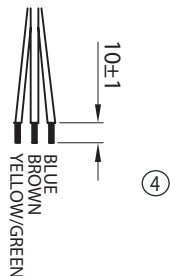


④

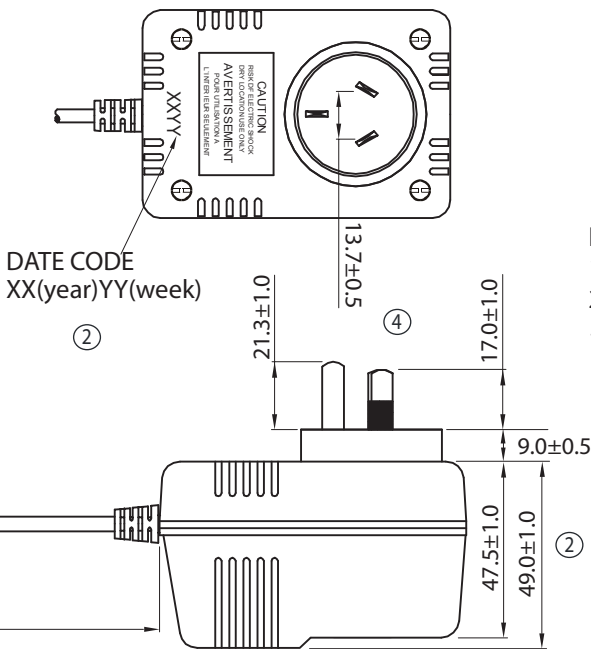

DATE CODE
XX(year)YY(week)


②

④

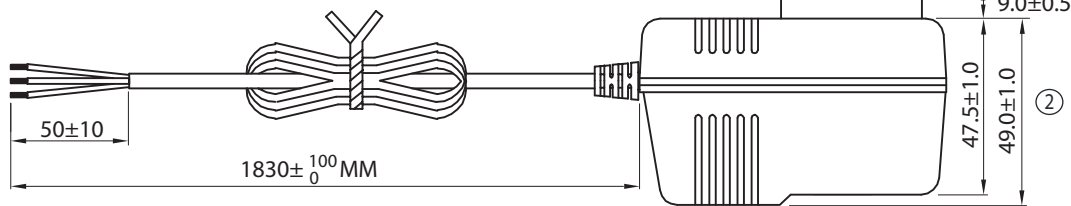


NOTES:

1. OUTPUT CORD: 20AWGX3C 1.83M Lead Free GREY (RAL7035)
2. CASE: GREY (RAL7035)
3. SECURITY SCREW IS AN ESSENTIAL REQUIREMENT, BOTH "⊥" AND "△" SHAPE ARE ACCEPTABLE

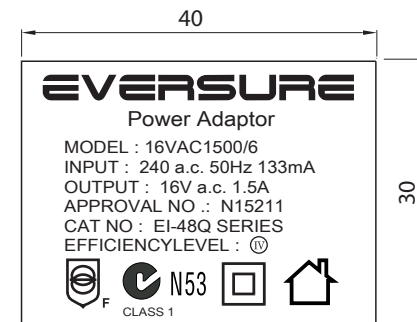


LABEL ARTWORK
Black word on Silver base label

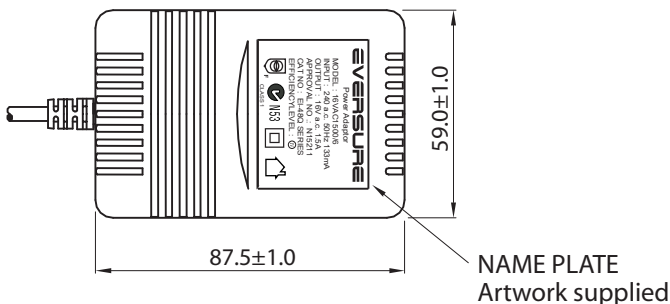

NAME PLATE
Artwork supplied

| | REVISED | DRAWN | APPROVED |
|---|--|----------------|--------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS SHAPPED SCREW TO SHAPE ⊥ SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |

| | | | | | | | | | | |
|---|-----|-------|----------|----------|-------------------------|---|------------|------|--------------|--|
| TE DRAWING NO: TE40-0001 R5 | | | | | PART NO: 16VAC1500MPS/6 | | | | | |
| DESCRIPTION: AC ADAPTOR EI-48Q,16VAC1500mA, 3 WIRE - MEPS | | | | | | | | | | |
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 |  | ORDER REF: | 0420 | SHEET 1 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/- .X.= +/-0.5 .XX.= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | | CUSTOMER: | TE | | |
| SCALE | NTS | MANU: | | | | DATE: | | | | |



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| ITEM | SPECIFICATION | |
|---|--|--|
| 1. Primary rated input voltage | AC240V 50Hz 133mA | |
| 2. Secondary rated output voltage and current | Unloaded voltage: AC 18 V ± 5% Loaded Voltage : AC 16 V ± 5% AT 1500 mA | |
| 3. Ripple voltage | *** mV (RMS) MAX. AT Rated Loading | |
| 4. Insulation resistance | Primary - secondary: DC 500 V 100 MΩ Min | |
| 5. Dielectric withstand test | Primary - secondary: AC 3.64 KV 1 seconds | |
| 6. Temperature rise | At rated loading 90°C max. For input coil (By resistance method) and 55°C max. on case surface (By use of thermometer) | |
| 7. EFFICIENCY | ≥ 79% | |
| 8. Leadout | Primary | SAA PLUG IN TYPE |
| | Secondary | PVC cable length: 1.8 Meter Colour : GREY (RAL7035) Wire size: AWG#20/3C Plug : STRIPPED AND TINNED |
| 9. Test circuit | | |
| 10. Case | SAA48 colour = GREY (RAL7035) | |

| | REVISED | DRAWN | APPROVED |
|---|--|----------------|--------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS-SHAPED SCREW TO SHAPE SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |

TE DRAWING NO: TE40-0001 R5


PART NO: 16VAC1500MPS/6


DESCRIPTION: AC ADAPTOR EI-48Q, 16VAC1500mA, 3 WIRE - MEPS




THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| | | | | | | | | | | |
|-------|-----|-------|----------|----------|----------------|-------|------------|------|--------------|--|
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 | | ORDER REF: | 0420 | SHEET 2 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/- .X.= +/-0.5 .XX.= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | | CUSTOMER: | TE | | |
| SCALE | NTS | MANU: | | | | DATE: | | | | |

| | REVISED | DRAWN | APPROVED |
|---|--|-------------------|-----------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS-SHAPPED SCREW TO SHAPE  SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |

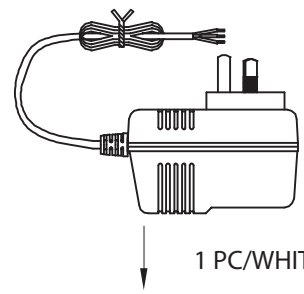


1 PC/WHITE BOX

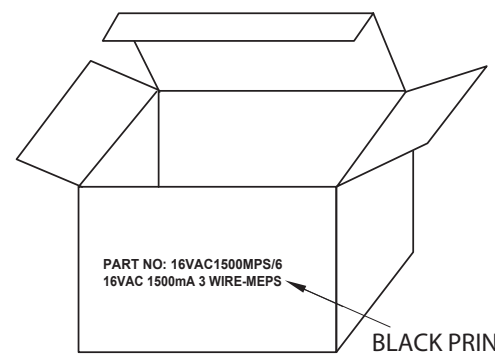


PART NO: 16VAC1500MPS/6
16VAC 1500mA 3 WIRE-MEPS

BLACK PRINTING

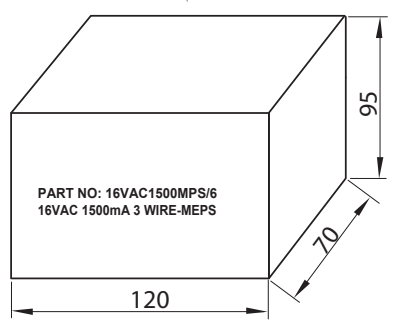


20 BOXES/CARTON ①

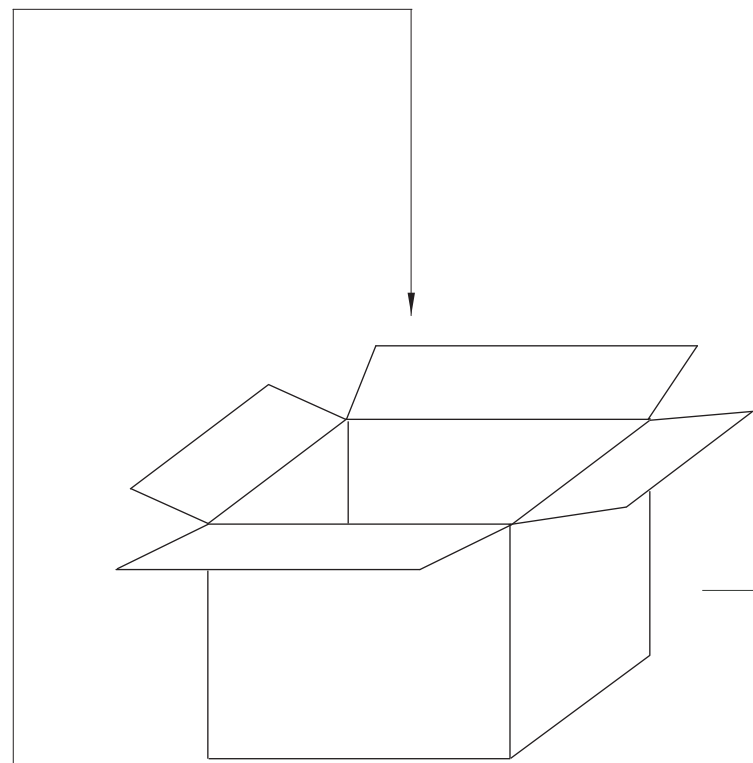

SHIPPING CARTON
PLEASE FOLLOW ORDER TO PRINT SHIPPING MARKS.

ADHESIVE TAPE

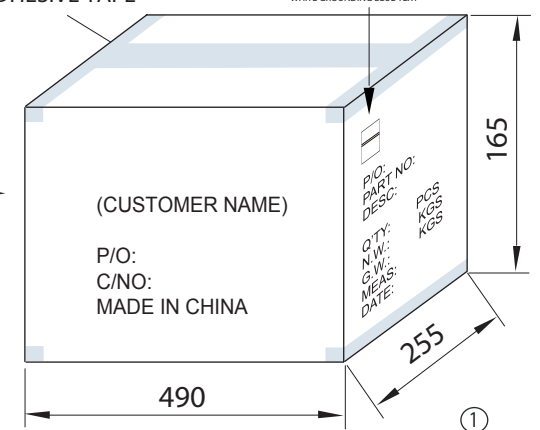

③

ONLY ONE RoHS+PASSED LABEL ON CARTON
RoHS LABEL(5X25MM)
GREEN GROUNDING YELLOW TEXT
PASSED LABEL(5X36MM)
BLUE GROUNDING WHITE TEXT
WHITE GROUNDING BLUE TEXT


①

TE DRAWING NO: TE40-0001 R5 PART NO: 16VAC1500MPS/6

DESCRIPTION: AC ADAPTOR EI-48Q,16VAC1500mA, 3 WIRE - MEPS



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| | | | | | | | | | | |
|-------|-----|-------|----------|----------|-------------------|---|------------|------|--------------|---|
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 |  | ORDER REF: | 0420 | SHEET 3 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/-1 .X.= +/-0.5 .XX.= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | | CUSTOMER: | TE | | |
| SCALE | NTS | MANU: | | | | | DATE: | | | |



Specifications TELLC0280

The TELLC0280 is the telephone lead with 606 Socket and 2 Meter length of Telephone Cord.

Colour: Ivory.

