



Specifications PRXMG5050+-V74

The PRXMG5050+-V74 is a Magellan 32-Zone Wireless Transceiver Control Panel.

Features:

- 2 serial outputs master/slave
- M2 two-way FSK hardware ready
- 8 on-board zones (16 with ATZ)
- Built-in transceiver (433 MHz)
- Expandable to 32 zones, 2 partitions, 32 users and 32 remotes
- 4-wire communication bus (connect up to 15 modules)
- Supports IP and cellular IP reporting
- Supports 16 PGMs (any of which can be wireless)
- App-based system control via BlueEye
- In-field firmware upgrade via 307USB And BabyWare remote or local
- Menu-driven programming for the Installer, Master and Maintenance codes
- Multiple telephone numbers for event reporting: 3 monitoring and 5 for Personal Dialing
- Calendar with Daylight savings Time
- StayD Mode
- Sleep arming method
- RF Jamming Supervision
- 512 events buffered.

P ▲ R ▲ D O X™



Specifications PRX278000033-P2C

The PRX278000033-P2C is a metal box enclosure for provision multiple module and panel mounting.

Features:

- Many punch-out holes for simple wiring
- Easy door removal
- Sizes: 28cm X 28cm X 7.6cm (11" x11" x 3")

P ▲ R ▲ D O X™



Specifications PRXK-TK278

The PRXK-TK278 is a BOM Kit for 1x tamper switch PRX2502302000-P2C and 1x tamper bracket PRX2781030000-P2C to suit with Paradox Metal Box Enclosure PRX2780000033-P2C; to protects against tampering (opening door or removal from wall).

P ▲ R ▲ D O X™

SP5500+ / SP6000+ / SP7000+ User Guide

4 to 32-Zone Expandable Security Systems



P ▲ R ▲ D O X™

AVERTISSEMENT : Un mauvais ajustement de la hauteur pourrait compromettre l'efficacité du détecteur.


Essai de marche

À 20 °C (68 °F), en mode de protection normale et en mode de traitement simple, un humain ne devrait pas pouvoir traverser plus d'une zone complète (composé de 2 faisceaux, détecteurs gauche et droit du capteur) dans la zone de couverture, et ce peu importe le mouvement effectué : marche lente, rapide ou course. En mode de protection élevée, la quantité de mouvement nécessaire à la génération d'une alarme est doublée. La largeur approximative d'un faisceau maximal à 11 m (35 pi) du détecteur est de 1,8 m (6 pi). Lors de l'essai de marche, s'assurer de toujours marcher d'un côté à l'autre de la trajectoire de détection, et non en direction du détecteur.


Diagramme de faisceau

Le DG75+ offre une portée de détection de 11 m x 11 m (35 pi x 35 pi) avec angle de prise de vue de 90°. Pour aider à la sélection du lieu d'installation et à l'exécution des essais de marche, voir la Figure 2 au verso.


Figure/Figura 1 Overview / Vista General / Vue d'ensemble

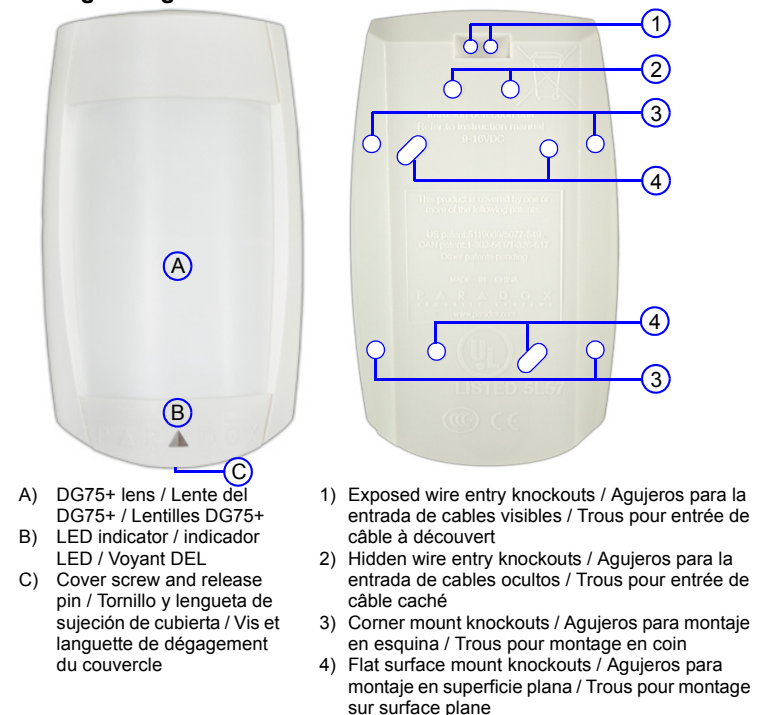


Figure/Figura 2 DG75+ Pet Array Beam Pattern / Estructura de Hacces / Diagramme de faisceau

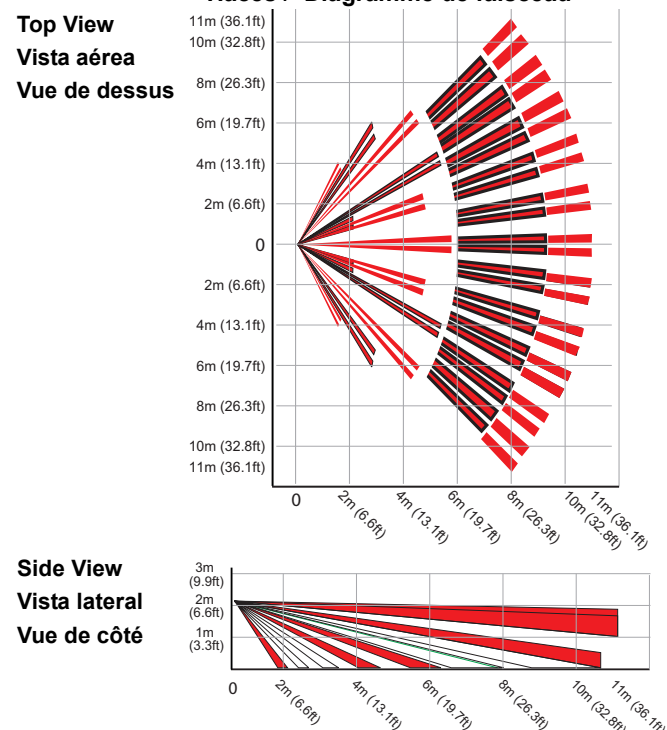

Figure/Figura 3 Wiring / Cableado / Câblage

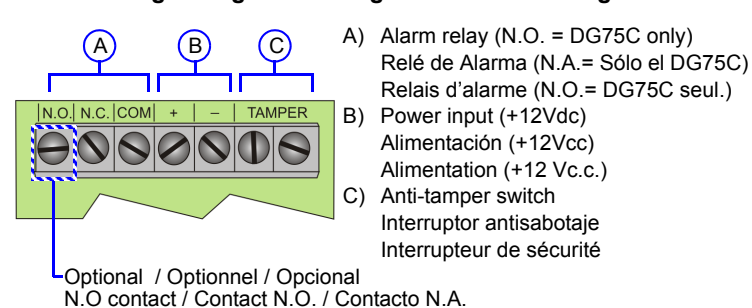

Figure/Figura 4 PCB Overview / Vista General / Vue d'ensemble

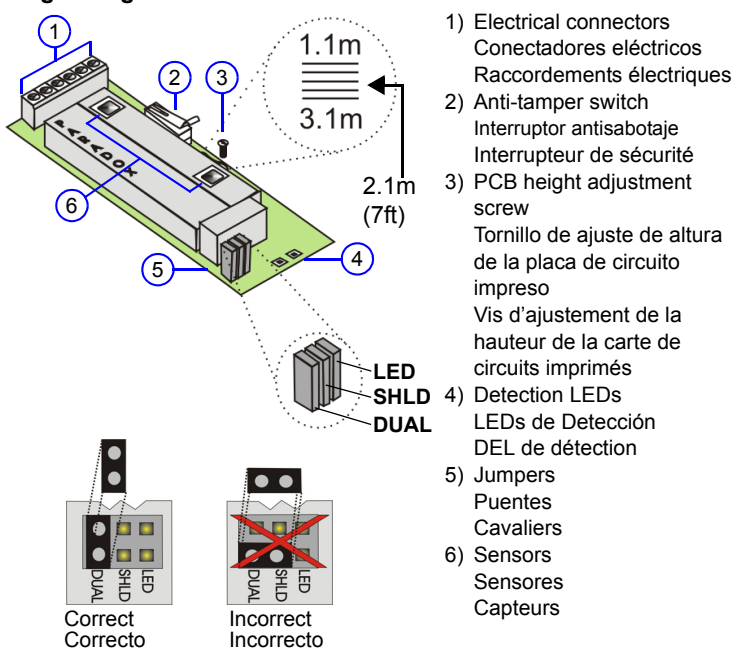


Table/Tableau/Tabla 1 Jumper Settings / Ajuste de los Puentes / Réglages des cavaliers

| LED | LED Indicator(s) Indicadores LED Voyant(s) DEL(s) |
|------|---|
| | OFF = Disabled / Deshabilitado / Désactivé ON = Enabled / Habilitado / Activé Δ |
| SHLD | Digital Shield (Sensitivity) Blindaje Shield Digital (Sensibilidad) Algorithme numérique Shield (Sensibilité) |
| | OFF = High Shield / Blindaje Superior / Protection élevée ON = Normal Shield / Blindaje Normal / Protection normale Δ |
| DUAL | Processing Type Tipo de Procesamiento Type de traitement |
| | OFF = Dual Edge / Polaridad Doble / Divisé ON = Single Edge / Polaridad Simple / Simple Δ |

Δ =default, de fábrica, par défaut

Figure/Figura 5 PCB Height / Altura de la PCI / Hauteur du PCB

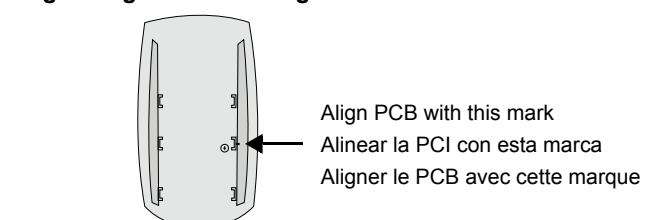

LED Feedback / LED de Confirmación / Rétroaction DEL

| LED State | Condition |
|---|--|
| Δ | Off / Désact. |
| \blacktriangle | On / Act. |
| flashing triangle | Flashing / Parpadeo / Clignote |
| Red triangle | On 3 seconds = Alarm signal generated Encendido 3 segundos = Se generó señal de alarma Allumée 3 secondes = Signal d'alarme généré |
| $\text{Red triangle with slash}$ | Flash = Movement signal does not reach required energy for an alarm Parpadeo = Señal de movimiento no alcanza la energía necesaria para generar una alarma Clignote = Signal de mouvement n'atteint pas l'énergie requise pour une alarme |
| $\text{Red triangle with double slash}$ | Flash 5 seconds = Power-up self-test Parpadeo 5 segundos = Prueba automática en encendido Clignote 5 secondes = Test automatique de mise sous tension |
| Green triangle | Flash = Signal does not match the characteristics of an alarm (non-movement signal) Parpadeo = La señal no reúne las características de una alarma (señal de sin movimiento) Clignote = Signal ne correspond pas aux caractéristiques d'une alarme (signal de non-mouvement) |

Specifications

| | |
|--------------------------|--|
| Pet immunity | Up to 40kg (90lbs) |
| Sensor type | Dual Element Infrared x 2 |
| Coverage -90° (standard) | 11m (35ft) X 11m (35ft) |
| Installation Height | 2.1m to 2.7m (7ft to 9ft) |
| RFI / EMI rejection | 10V/m rejection from 10MHz to 1GHz |
| Sensor geometry | Rectangular |
| Voltage input | Typically 11 to 16Vdc |
| Current consumption | 15mA max. / 6mA min. (LED disabled) |
| Anti-tamper switch | 150mA / 28Vdc, N.C. |
| Lens | 2nd generation Fresnel lens, LODIFF®, segments |
| Alarm output* | DG75+ = Form A relay 100mA/28Vdc, N.C. DG75C = Form C relay 200mA/ 28Vdc, N.C./N.O. |
| Detection speed | 0.2m/s to 3.5m/s (0.6ft/s to 11.5ft/s) Ingress |
| Operating temperature | -10°C to +50°C (14°F to +122°F) |
| Environmental Standards | Complies with EN 50131 Security Grade 2 / Environmental Class I |

* Form C relay has not been investigated for compliance to EN 50131.
Patents: One or more of the following US patents may apply: 7046142, 6215399, 6111256, 6104319, 5920259, 5886632, 5721542, 5287111, and RE39406 and other pending patents may apply. Canadian and international patents may also apply. LODIFF® lens: patent #4,787,722 (U.S.). Canadian and international patents may also apply. LODIFF® a registered trademark of Fresnel Technologies Inc.
Trademarks: Digigard and Shield are trademarks or registered trademarks of Paradox Ltd. or its affiliates in Canada, the United States and/or other countries.
Certification: For the latest information on products approvals, such as UL and CE, please visit www.paradox.com.
Warranty: For complete warranty information on this product please refer to the Limited Warranty Statement found on the website www.paradox.com/terms. Your use of the Paradox product signifies your acceptance of all warranty terms and conditions.
© 2015 Paradox Ltd. All rights reserved. Specifications may change without prior notice.

Especificaciones

| | |
|---|--|
| Inmune a mascotas | De hasta 40kg (90lbs) |
| Tipo de Sensor | Infrarrojo de Dos Elemento (x 2) |
| Cobertura -90° (estándar) | 11m (35ft) X 11m (35ft) |
| Altura de Instalación | 2.1m a 2.7m (7ft a 9ft) |
| Rechazo a interferencias electromagnéticas y de radiofrecuencia | 10V/m de rechazo entre 10MHz a 1GHz |
| Geometría del Sensor | Rectangular |
| Tensión de entrada | Típico de 11 a 16Vcc |
| Consumo de corriente | 15mA máx. / 6mA mín. (LED deshabilitado) |
| Interruptor antisabotaje | 150mA/28Vcc, N.C. |

| | |
|-------------------------------|---|
| Lente | Lente Fresnel de 2da generación, LODIFF®, segmentos |
| Salida de alarma* | DG75+ = Relé de Forma A de 100mA/28Vcc, N.C. DG75C = Relé de Forma C de 200mA/28Vcc, N.C./N.A. |
| Velocidad de detección | Ingreso 0.2m/s a 3.5m/s (0.6ft/s a 11.5ft/s) |
| Temperatura de funcionamiento | -10°C a +50°C (14°F a +122°F) |
| Estándares Ambientales | Cumple con EN 50131 Security Grade 2 / Environmental Class I |

* El relé de Forma C no ha sido examinado respecto a su conformidad con EN 50131.

Patentes: Una o más de las siguientes patentes EE.UU. podría aplicarse: 7046142, 6215399, 6111256, 6104319, 5920259, 5886632, 5721542, 5287111, y RE39406 y otras patentes pendientes podrían aplicarse. Patentes canadienses e internacionales también podrían aplicarse. Lente LODIFF®: patente #4,787,722 (EE.UU.). Patentes canadienses e internacionales también podrían aplicarse. LODIFF® es una marca registrada de Fresnel Technologies Inc.

Marcas de comercio: Digigard y Shield son marcas de comercio o marcas registradas de Paradox Ltd. o de sus afiliados en Canadá, Estados Unidos y/o otros países.

Certificación: Para información actualizada respecto a la homologación de productos, como UL y CE, sírvase visitar nuestro sitio Web en www.paradox.com.

Garantía: Para una información detallada acerca de la garantía de este producto consultar la Declaración de Garantía Limitada (en inglés) que se encuentra en el sitio web de paradox: www.paradox.com/terms. El uso de este producto Paradox significa la aceptación de todos los términos y condiciones de la garantía.

© 2015 Paradox Ltd. Todos los derechos reservados. Las especificaciones pueden cambiar sin previo aviso.

Spécifications

| | |
|---|---|
| Insensibilité aux animaux | Jusqu'à 40 kg (90 lb) |
| Type de capteur | Élément double infrarouge x 2 |
| Couverture -90° (standard) | 11 m (35 pi) X 11 m (35 pi) |
| Hauteur d'installation | 2,1 m à 2,7 m (7 pi à 9 pi) |
| Protection contre les perturbations électromagnétiques et les interférences radiofréquences | Réjection de 10 V/m entre 10 MHz et 1GHz |
| Géométrie du capteur | Rectangulaire |
| Tension d'entrée | Généralement 11 à 16 Vc.c. |
| Consommation de courant | 15 mA max. / 6 mA min. (DEL désact.) |
| Interrupteur de sécurité | 150 mA / 28 Vc.c., N.F. |
| Lentilles | Lentilles Fresnel 2ème génération, segments LODIFF® |
| Sortie d'alarme* | DG75+ = Relais de forme A de 100 mA / 28 Vc.c., N.F. DG75C = Relais de forme C de 200 mA / 28 Vc.c., N.F./N.O. |
| Vitesse de détection | Ingress 0,2 m/s à 3,5 m/s (0,6 pi/s à 11,5 pi/s) |
| Température de fonctionnement | -10°C à +50°C (14°F à +122°F) |
| Standards environnementaux | Conforme EN 50131 Security Grade 2 / Environmental Class I |

* Le relais de forme C n'a pas encore été examiné pour la conformité avec EN 50131.

Brevets: Un ou plusieurs des brevets suivants peuvent s'appliquer : 7046142, 6215399, 6111256, 6104319, 5920259, 5886632, 5721542, 5287111, et RE39406 et d'autres brevets en instance. Des brevets canadiens et internationaux peuvent aussi s'appliquer. Lentilles LODIFF® : brevet #4,787,722 (U.S.). LODIFF® est une marque déposée de Fresnel Technologies Inc.

Marques de commerce: Digigard et Shield sont des marques de commerce ou des marques de commerce déposées de Paradox Ltée ou de ses sociétés affiliées au Canada, aux États-Unis et/ou dans d'autres pays.

Certification: Pour les renseignements les plus récents concernant l'approbation UL et CE des produits, veuillez visiter le www.paradox.com.

Garantie: Pour tous les renseignements sur la garantie de ce produit, veuillez vous référer à la Déclaration de garantie limitée qui se trouve sur le site Web au www.paradox.com/terms. L'utilisation des produits Paradox signifie l'acceptation de toutes les modalités et conditions de la garantie.

© Paradox Ltée, 2015. Tous droits réservés. Spécifications sujettes à changement sans préavis.



Specifications DFMWP16

The DFMWP16 is combo siren and strobe (slim design).

- New design
- Siren tone selectable for different applications
- Sound volume adjustable: low dB for testing and high dB for normal operation
- Bright: new LED strobe design
- Independent siren and strobe operation
- High quality UV treated case
- Weatherproof
- Front and back tampers
- EOLRs built in, suitable for most major alarm panels

Operating voltage: 9-15VDC

SPL @ 1meter: 110dB

Siren current draw: 150mA

Strobe current draw: 50mA

Siren tone selectable: Tone 1: warble; Tone 2: Hi/Lo

Dimension: 200 x 110 x 40mm





WP16 Combo Siren/Strobe

Voltage: 9-15VDC




Current: Max 150mA @ 12VDC

High Volume: 110±3 dB @ 1meter

Low Volume: 95±3 dB @ 1meter

Tone 1: Warble

Tone 2: Hi/Lo



+ Siren - Input + Strobe - Input + LED - Night Comfort Tamper Output Spare





Specifications DFMWP08

The DFMWP08 is indoor top hat piezo.

Input voltage: 12VDC

SPL @ 1meter: 105dB

Current draw: 90mA





VRLA 12V7AH

SA12V7

Specifications

| | | |
|----------------------------------|--|-------------------------------|
| Nominal Voltage | 12 V | |
| Nominal Capacity 20HR | 7.0 AH | |
| Dimensions | Length | 151±1mm (5.94 inches) |
| | Width | 65±1mm (2.56 inches) |
| | Container Height | 95±1mm (3.74 inches) |
| | Total Height (with terminal) | 100±1mm (3.94 inches) |
| Approx Weight | Approx 2.10 kg (4.63 lbs) | |
| Terminal | F1 | |
| Container Material | ABS Plastic | |
| Lead Material | Purity Lead 99.995% | |
| Sulfuric Acid | Distilled Sulfuric Acid (Zero metal content) | |
| Separator | AGM | |
| Rated Capacity | 7.00 AH/0.350A | (20hr, 1.80V/cell, 25°C/77°F) |
| | 6.53 AH/0.653A | (10hr, 1.80V/cell, 25°C/77°F) |
| | 6.00 AH/1.20A | (5hr, 1.75V/cell, 25°C/77°F) |
| | 5.37 AH/1.79A | (3hr, 1.75V/cell, 25°C/77°F) |
| | 4.55 AH/4.55A | (1hr, 1.60V/cell, 25°C/77°F) |
| Max. Discharge Current | 105A (5s) | |
| Internal Resistance | Approx 23mΩ | |
| Operating Temp.Range | Discharge | : -15 - 50°C (5 - 122°F) |
| | Charge | : 0 - 40°C (32 - 104°F) |
| | Storage | : -15 - 40°C (5 - 104°F) |
| Nominal Operating Temp.Range | 25±3°C (77±5°F) | |
| Cycle Use | Initial Charging Current less than 2.1A. Voltage 14.4V - 14.7V at 25°C (77°F) Temp.Coefficient -30mV/°C | |
| Standby Use | No limit on Initial Charging Current Voltage 13.5V - 13.8V at 25°C (77°F) Temp.Coefficient -20 mV/°C | |
| Capacity affected by Temperature | 40°C (104°F) 103% 25°C (77°F) 100% 0°C (32°F) 86% | |
| Self Discharge | Sentry AGM series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter. | |




Applications

- All purpose
- Standby Applications
- Recreation Vehicles
- Uninterruptible Power Supply (UPS)
- Electric Power System (EPS)
- Fire & Security
- Generators
- Medical Equipment

Dimensions

F1 Terminal

Unit: mm (inches)

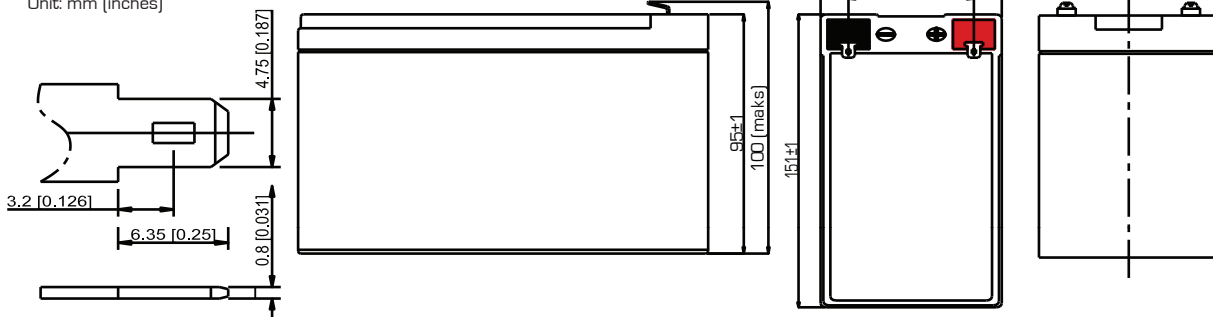


Constant Current Discharge (Amperes) at 25°C (77°F)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-------|-------|-------|
| 1.85V/cell | 18.0 | 12.8 | 10.48 | 8.79 | 6.53 | 4.79 | 3.86 | 2.29 | 1.69 | 1.36 | 1.14 | 0.98 | 0.774 | 0.640 | 0.345 |
| 1.80V/cell | 21.4 | 14.3 | 11.4 | 9.44 | 6.94 | 5.05 | 4.03 | 2.38 | 1.74 | 1.40 | 1.17 | 1.01 | 0.791 | 0.653 | 0.350 |
| 1.75V/cell | 24.2 | 15.6 | 12.2 | 10.0 | 7.29 | 5.27 | 4.18 | 2.45 | 1.79 | 1.43 | 1.20 | 1.03 | 0.805 | 0.663 | 0.357 |
| 1.70V/cell | 26.7 | 16.7 | 12.9 | 10.5 | 7.59 | 5.46 | 4.32 | 2.51 | 1.83 | 1.46 | 1.22 | 1.05 | 0.817 | 0.672 | 0.361 |
| 1.65V/cell | 28.8 | 17.7 | 13.5 | 10.9 | 7.86 | 5.62 | 4.46 | 2.57 | 1.86 | 1.48 | 1.23 | 1.06 | 0.826 | 0.680 | 0.365 |
| 1.60V/cell | 30.6 | 18.6 | 14.1 | 11.3 | 8.09 | 5.76 | 4.55 | 2.61 | 1.89 | 1.50 | 1.25 | 1.07 | 0.834 | 0.685 | 0.367 |


Constant Power Discharge (Watts/Cell) at 25°C (77°F)

| F.V./Time | 5min | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-------|-------|-------|
| 1.85V/cell | 34.2 | 24.5 | 20.2 | 17.1 | 12.8 | 9.44 | 7.64 | 4.56 | 3.37 | 2.72 | 2.29 | 1.99 | 1.565 | 1.296 | 0.701 |
| 1.80V/cell | 40.2 | 27.2 | 21.9 | 18.3 | 13.5 | 9.91 | 7.96 | 4.72 | 3.47 | 2.79 | 2.34 | 2.03 | 1.593 | 1.318 | 0.708 |
| 1.75V/cell | 45.1 | 29.5 | 23.3 | 19.3 | 14.2 | 10.3 | 8.23 | 4.85 | 3.55 | 2.85 | 2.39 | 2.06 | 1.616 | 1.344 | 0.719 |
| 1.70V/cell | 49.2 | 31.3 | 24.5 | 20.1 | 14.7 | 10.6 | 8.48 | 4.96 | 3.62 | 2.89 | 2.42 | 2.09 | 1.633 | 1.347 | 0.725 |
| 1.65V/cell | 52.6 | 32.9 | 25.5 | 20.8 | 15.2 | 10.9 | 8.73 | 5.05 | 3.68 | 2.93 | 2.45 | 2.11 | 1.649 | 1.359 | 0.731 |
| 1.60V/cell | 55.5 | 34.3 | 26.3 | 21.5 | 15.5 | 11.2 | 8.88 | 5.12 | 3.72 | 2.96 | 2.47 | 2.13 | 1.660 | 1.367 | 0.734 |


Discharge Characteristics

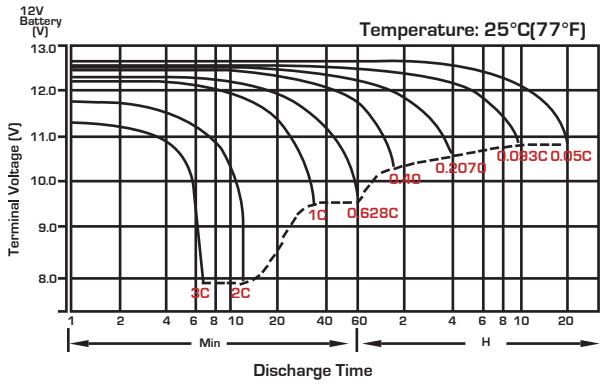


Float Charging Characteristics

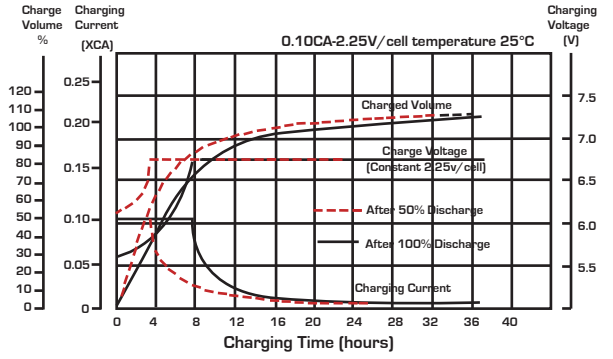


Temperature Effects in Relation to Battery Capacity

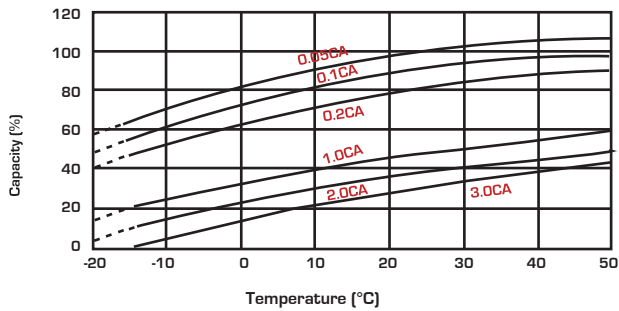


Effect of Temperature on Long Term Float Life

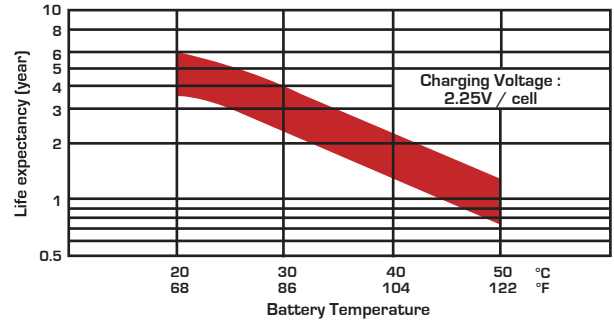

Cycle Life in Relation to Depth of Discharge

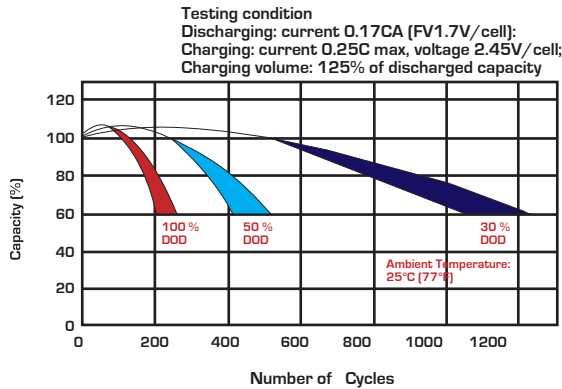

Self Discharge Characteristics

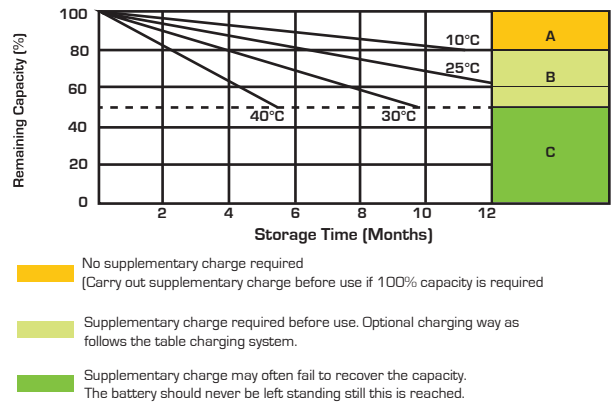

Charging System

| DOD | Current Limit (A) | Constant Voltage (V) | Fully Charged Time (h) |
|-----|---------------------|----------------------|------------------------|
| 20 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 10 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 8 |
| 50 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 15 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 12 |
| 80 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 16 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 14 |
| 100 | 0.15C ₁₀ | 13.5-13.8 vpc (12V) | 20 |
| | 0.20C ₁₀ | 6.75-6.9 vpc (6V) | 18 |

State of Charge (SOC)

| Open Circuit Voltage (V/cell) | Open Circuit Voltage (12V/cell) | Open Circuit Voltage (6V/cell) | State of Charge (% of full charge capacity) |
|-------------------------------|---------------------------------|--------------------------------|---|
| 2.14-2.15 | 12.84-12.90 | 6.42-6.46 | 100 |
| 2.12-2.13 | 12.72-12.78 | 6.36-6.39 | 90 |
| 2.11 | 12.66 | 6.33 | 80 |
| 2.09 | 12.54 | 6.27 | 70 |
| 2.07 | 12.42 | 6.21 | 60 |
| 2.05 | 12.30 | 6.15 | 50 |







Sealed Performance Batteries

Domestic Sales | Ph: +61 (0)7 3386 1102 | Fax: +61 (0)7 3102 9913

sales@spb.net.au | www.sealedperformance.com.au

National Warehouse | 1 Ant Road | Yatala, Brisbane QLD 4207


Melbourne Office | 2/9 Compark Circuit | Mulgrave, Melbourne VIC 3170

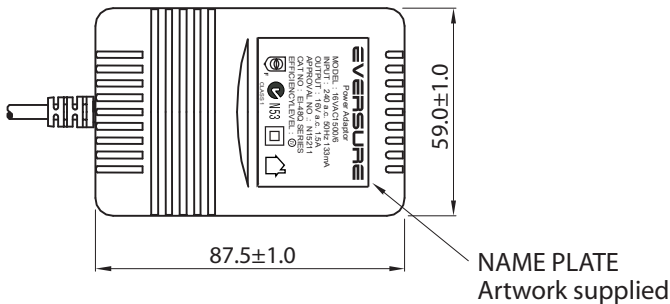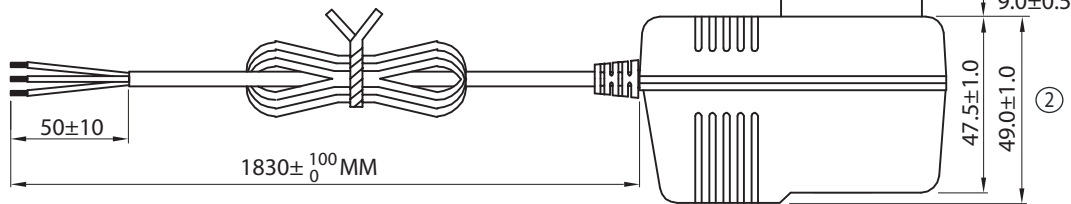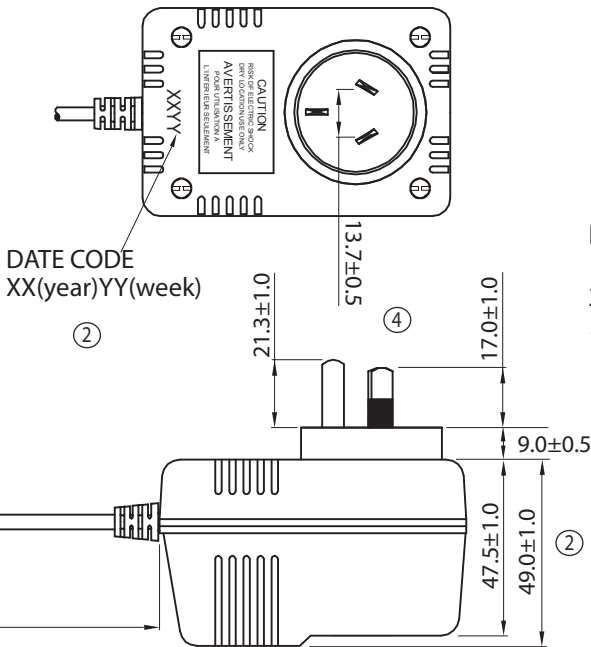

| | REVISED | DRAWN | APPROVED |
|---|--|-------------------|-----------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS-SHAPED SCREW TO SHAPE SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |

NOTES:

1. OUTPUT CORD: 20AWGX3C 1.83M Lead Free GREY (RAL7035)
2. CASE: GREY (RAL7035)
3. SECURITY SCREW IS AN ESSENTIAL REQUIREMENT, BOTH "⊥" AND "△" SHAPE ARE ACCEPTABLE

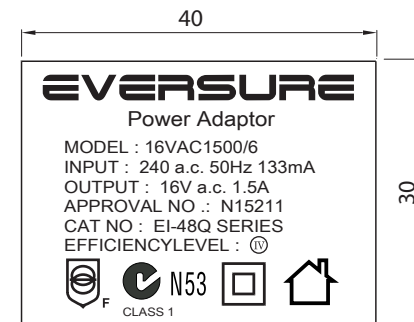

LABEL ARTWORK
Black word on Silver base label

| | | | | | | | | | |
|--|-----|-------|----------|----------|-------------------------|--------------|--------------------|--------------|--|
| TE DRAWING NO: TE40-0001 R5 | | | | | PART NO: 16VAC1500MPS/6 | | | | |
| DESCRIPTION: AC ADAPTOR EI-48Q, 16VAC1500mA, 3 WIRE - MEPS | | | | | | | | | |
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 | | ORDER REF: 0420 | SHEET 1 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/- .X.= +/-0.5 .XX.= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | CUSTOMER: TE | | | |
| SCALE | NTS | MANU: | | | | DATE: | | | |



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| ITEM | SPECIFICATION | |
|---|--|--|
| 1. Primary rated input voltage | AC240V 50Hz 133mA | |
| 2. Secondary rated output voltage and current | Unloaded voltage: AC 18 V ± 5% Loaded Voltage : AC 16 V ± 5% AT 1500 mA | |
| 3. Ripple voltage | *** mV (RMS) MAX. AT Rated Loading | |
| 4. Insulation resistance | Primary - secondary: DC 500 V 100 MΩ Min | |
| 5. Dielectric withstand test | Primary - secondary: AC 3.64 KV 1 seconds | |
| 6. Temperature rise | At rated loading 90°C max. For input coil (By resistance method) and 55°C max. on case surface (By use of thermometer) | |
| 7. EFFICIENCY | ≥ 79% | |
| 8. Leadout | Primary | SAA PLUG IN TYPE |
| | Secondary | PVC cable length: 1.8 Meter Colour : GREY (RAL7035) Wire size: AWG#20/3C Plug : STRIPPED AND TINNED |
| 9. Test circuit | | |
| 10. Case | SAA48 colour = GREY (RAL7035) | |

| | REVISED | DRAWN | APPROVED |
|---|--|----------------|--------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS-SHAPED SCREW TO SHAPE SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |

TE DRAWING NO: TE40-0001 R5


PART NO: 16VAC1500MPS/6


DESCRIPTION: AC ADAPTOR EI-48Q,16VAC1500mA, 3 WIRE - MEPS




THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| | | | | | | | | | | |
|-------|-----|-------|----------|----------|----------------|-------|------------|------|--------------|--|
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 | | ORDER REF: | 0420 | SHEET 2 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/- .X= +/-0.5 .XX= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | | CUSTOMER: | TE | | |
| SCALE | NTS | MANU: | | | | DATE: | | | | |


| | REVISED | DRAWN | APPROVED |
|---|--|-------------------|-----------------------|
| ① | AMENDED PACKING QTY AND CARTON SIZE | JACKY 10/08/09 | GARY 10/08/09 |
| ② | ADDED DATE CODE ON CASE AND DIMENSIONS | JACKY 07/12/09 | GARY 07/12/09 |
| ③ | ADDED PASSED LABEL ON CARTON | TODD 22/12/10 | JACKY 22/12/10 |
| ④ | AMENDED AC PINS DIMENSION & ADDED WIRES COLORS | ANLEI 01/11/12 | ANLEI 01/11/12 |
| ⑤ | CHANGED CROSS-SHAPPED SCREW TO SHAPE  SCREW ON CASE | MARK 31/08/15 | FREDERICK 31/08/15 |




1 PC/WHITE BOX

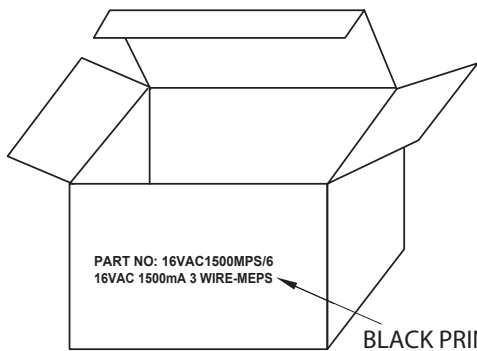

BLACK PRINTING


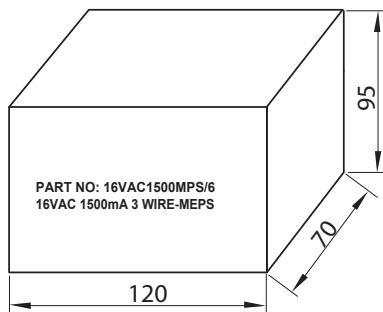


20 BOXES/CARTON ①

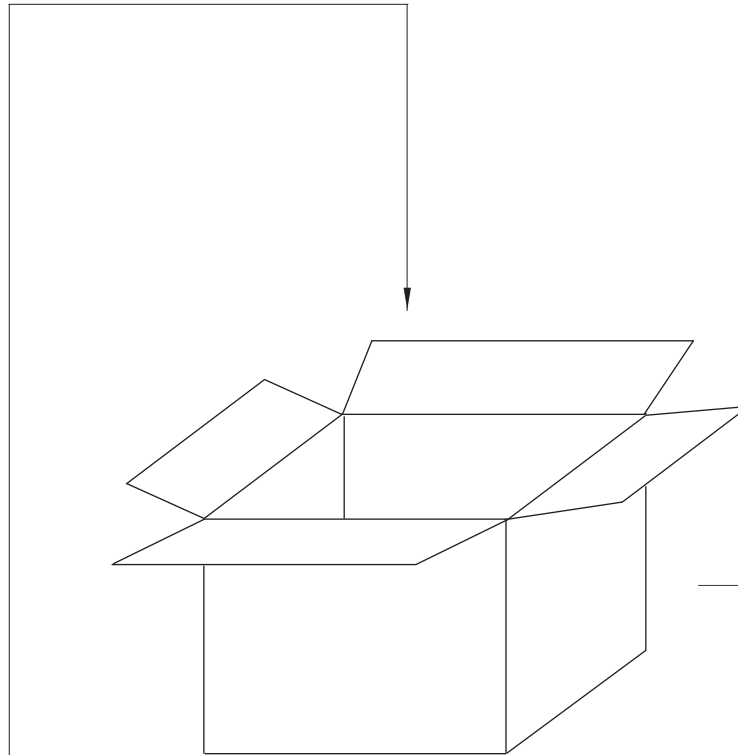

SHIPPING CARTON
PLEASE FOLLOW ORDER TO PRINT SHIPPING MARKS.

ADHESIVE TAPE

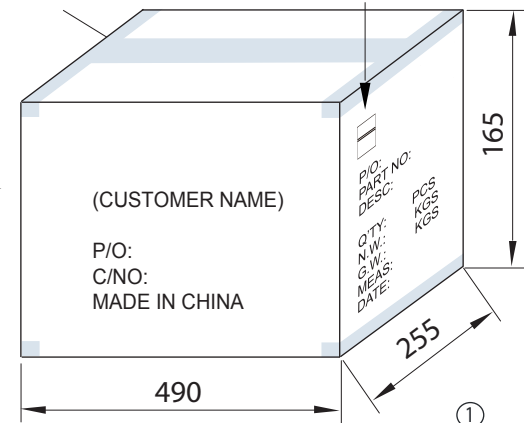

③


ONLY ONE RoHS+PASSED LABEL ON CARTON
RoHS LABEL(5X25MM)
GREEN GROUNDING YELLOW TEXT
PASSED LABEL(5X36MM)
BLUE GROUNDING WHITE TEXT
WHITE GROUNDING BLUE TEXT

| | |
|-----------------------------|-------------------------|
| TE DRAWING NO: TE40-0001 R5 | PART NO: 16VAC1500MPS/6 |
|-----------------------------|-------------------------|

DESCRIPTION: AC ADAPTOR EI-48Q,16VAC1500mA, 3 WIRE - MEPS



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF TELEPHONE EQUIPMENT (NSW) Pty Ltd AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TELEPHONE EQUIPMENT (NSW) Pty Ltd

| | | | | | | | | | | |
|-------|-----|-------|----------|----------|-------------------|---|------------|------|--------------|---|
| SIZE | A4 | DATE | 30/04/09 | CHECKED | KEVIN 30/04/09 |  | ORDER REF: | 0420 | SHEET 3 OF 3 | TOLERANCES UNLESS OTHERWISE STATED X.= +/-1 .X.= +/-0.5 .XX.= +/-0.2 |
| UNIT | MM | DRAWN | KEVIN | APPROVED | FRANK 30/04/09 | | CUSTOMER: | TE | | |
| SCALE | NTS | MANU: | | | | | DATE: | | | |



Specifications TELLC0280

The TELLC0280 is the telephone lead with 606 Socket and 2 Meter length of Telephone Cord.

Colour: Ivory.

