

# Overhead Door Magnetic Contacts

## 2202 Series

### OVERVIEW

The Interlogix 2202 Series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations.

The floor mount units are constructed with a low profile heavy cast aluminum housing. The reed switch assembly is fully encased in Interlogix's exclusive polyurethane potting material to prevent damage due to moisture or humidity. A wide operating gap distance of up to 3 inches makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

The 2202 Series is available with a universal style magnet that allows for greater installation flexibility.



### STANDARD FEATURES

- Wide 3-inch operating gap
- Fully sealed switch
- Form C unit available
- Mounting hardware included

# Overhead Door Magnetic Contacts

North America  
T 855-286-8889

Asia  
T 852-2907-8108

Australia  
T 61-3-9239-1200

Europe  
T 32-2-725-11-20

Latin America  
T 561-998-6114

## 2202 Series

### Specifications

Electrical	2202	2204
Voltage	100V AC/DC (supplied by control panel)	30V AC/DC (supplied by control panel)
Current	0.5A maximum	0.25A maximum
Power	7.5W maximum	3.0W maximum



Features	2202	2204
Loop type	Closed	Open or closed
Electrical configuration	Normally open	SPDT
Gap distance	Up to 3 inches	
Lead type	18 inch flexible stainless steel cable	
Lead colors		common; white - closed loop (N.O.); red - open loop (N.C.)

Physical	2202	2204
Dimensions 2202A (LxWxD)	3.50 x 1.50 x 1.50 in. (89 x 38 x 38 mm)	
Dimensions 2202AU and 2204AU (LxWxD)	3.125 x 2.125 x 0.81 in. (79 x 54 x 21 mm)	
Construction	Cast aluminum	
Color	Aluminum	
Regulatory	C-UL-US	

### Ordering Information

<b>2202A-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Aluminum Housing, 3 in. Gap Size, Closed Loop, Includes 18 in. Stainless Steel Armored Cable
<b>2202AU-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Universal Magnet, 3 in. Gap Size, Closed Loop, Includes 18 in. Stainless Steel Armored Cable
<b>2204A-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Aluminum Housing, 3 in. Gap Size, SPDT, Includes 18 in. Stainless Steel Armored Cable
<b>2204AU-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Universal Magnet, 3 in. Gap Size, SPDT, Includes 18 in. Stainless Steel Armored Cable

### Dimensional Diagram

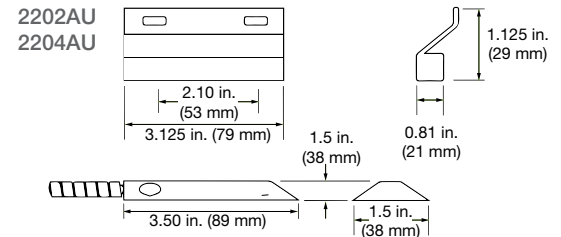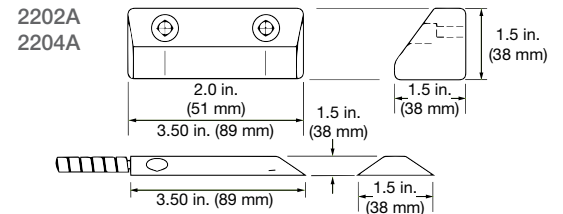

interlogix.com

Specifications subject to change without notice.

© 2013 Interlogix.  
All rights reserved.  
Interlogix is part of UTC Climate, Controls & Security,  
a unit of United Technologies Corporation.

306-3683 2013/07 (75101)