



## PS-1208 12 Volt 0.8 AH


### Rechargeable Sealed Lead Acid Battery



### Terminals (mm)

- Leads terminated with free hanging AMP. INC MATE-N-LOK connector, Socket housing 1-480318-0 mates with pin housing 1-480319-0. Lead length: 6.50" (168mm)

### Physical Dimensions: in (mm)

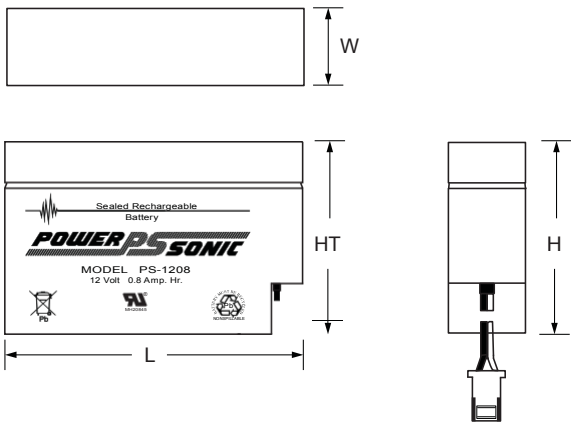

**L: 3.78 (96) W: 0.98 (25) H: 2.44 (62) HT: 2.44 (62)**

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845


### Performance Specifications

<b>Nominal Voltage</b> .....	12 volts (6 cells)
<b>Nominal Capacity</b>	
20-hr. (40mA to 10.50 volts) .....	0.80 AH
10-hr. (72mA to 10.50 volts) .....	0.72 AH
5-hr. (130mA to 10.20 volts) .....	0.65 AH
1-hr. (480mA to 9.00 volts) .....	0.48 AH
15-min. (1.5A to 9.00 volts) .....	0.38 AH
<b>Approximate Weight</b> .....	0.77 lbs. (0.35 kg)
<b>Energy Density</b> (20-hr. rate) .....	1.06 W-h/in <sup>3</sup> (64.81 W-h/l)
<b>Specific Energy</b> (20-hr. rate) .....	12.47 W-h/lb (27.49 W-h/kg)
<b>Internal Resistance</b> (approx.) .....	n/a
<b>Max Discharge Current</b> (7 Min.) .....	2.4 amperes
<b>Max Short-Duration Discharge Current</b> (10 Sec.).....	n/a
<b>Shelf Life</b> (% of nominal capacity at 68 °F (20 °C))	
1 Month .....	97%
3 Months.....	91%
6 Months .....	83%
<b>Operating Temperature Range</b>	
Charge.. .....	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge.....	-40 °F (-40 °C) to 140 °F (60 °C)
<b>Case</b> .....	ABS Plastic
<b>Power-Sonic Chargers</b> .....	PSC-12250F


**Shelf Life & Storage**

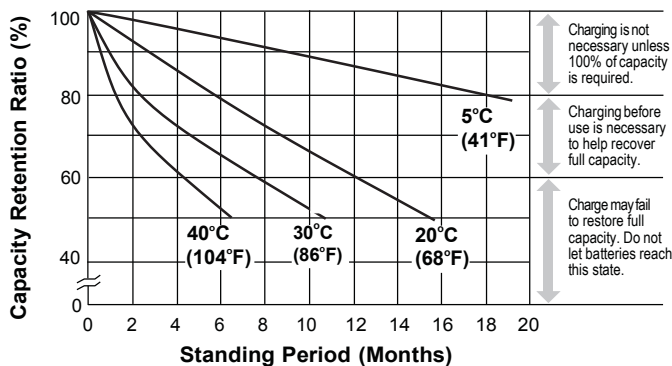


**Discharge Characteristics**

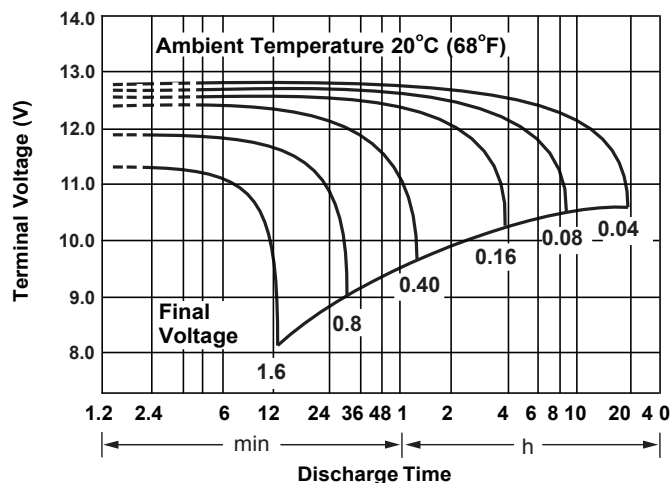


**Discharge Time vs. Discharge Current**

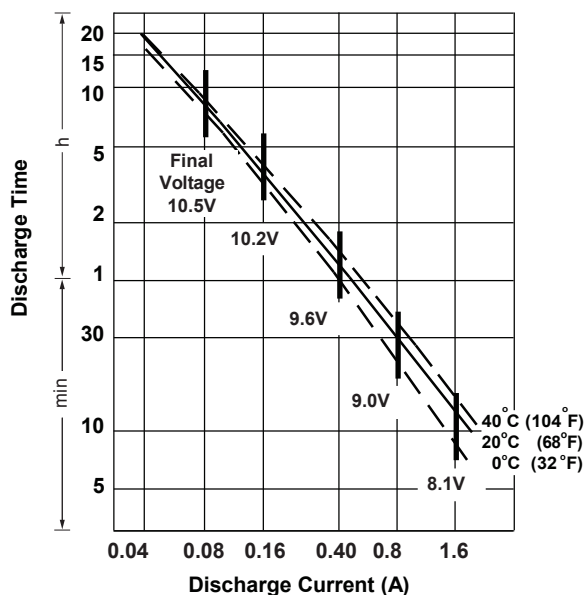

**Life Characteristics in Stand-By Use**

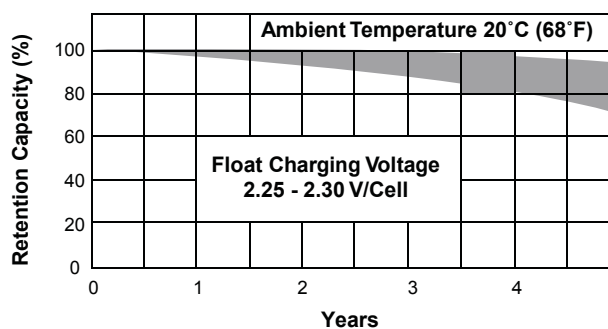

**Life Characteristics in Cyclic Use**

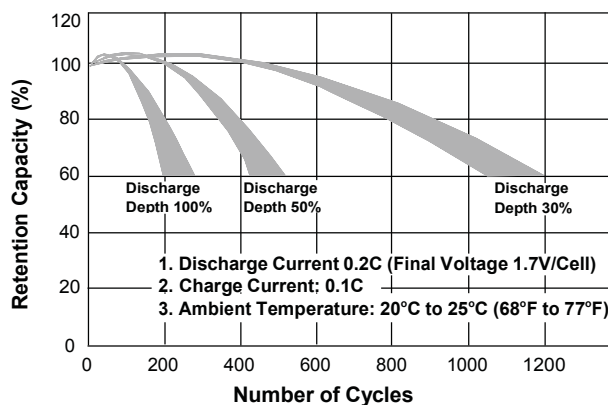

**Charging**

**Cycle Applications:** Limit initial current to 240mA. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 8mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.

**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**



**DOMESTIC SALES**  
 Tel: (07) 3386 1102  
 Fax: (07) 3102 9913  
[sales@spb.net.au](mailto:sales@spb.net.au)

[www.sealedperformance.com.au](http://www.sealedperformance.com.au)  
 1 Ant Road, Yatala  
 Brisbane QLD 4207

