


**PS-121200 12 Volt 124.8 AH @ 20-hr. rate**  
**120.0 AH @ 10-hr. rate**

**Rechargeable Sealed Lead Acid Battery**





## Terminals (mm)

- T11 - THREADED INSERT - 8mm STUD



## Physical Dimensions: in (mm)



**L: 16.14 (410) W: 6.97 (177) H: 8.86 (225) HT: 8.86 (225)**

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

## Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

## Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

### Nominal Capacity

20-hr.	(6.24A to 10.50 volts) .....	124.8AH
10-hr.	(12.0A to 10.50 volts) .....	120.0 AH
8-hr.	(14.3A to 10.50 volts).....	114.4AH
5-hr.	(20.64A to 10.20 volts) .....	103.2 AH
3-hr.	(31.2A to 10.20 volts).....	93.6 AH
1-hr.	(73.2A to 9.60 volts) .....	73.2 AH

**Approximate Weight** ..... 77.2 lbs. (35.0kg)

**Energy Density** (10-hr. rate) ..... 1.44 W-h/in<sup>3</sup> (88.16 W-h/l)

**Specific Energy** (10-hr. rate) ..... 18.65 W-h/lb (41.12 W-h/kg)

**Internal Resistance** (approx.) ..... 4.0 milliohms

**Max Short-Duration Discharge Current** (10 Sec.)..... 374 amperes

### Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month .....	97%
3 Months.....	91%
6 Months .....	83%

### Operating Temperature Range

Charge.. .....	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge.....	-40 °F (-40 °C) to 140 °F (60 °C)

**Case** ..... ABS Plastic



**Power-Sonic Chargers** ..... n/a

**CONSTANT CURRENT DISCHARGE (Amperes) at 77° F (25° C)**

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85V	236.21	185.7	157.9	132.13	104.99	79.46	65.09	36.00	28.50	23.30	18.80	16.30	13.30	11.60	6.18
1.80V	317.05	237.2	190.8	156.17	123.85	92.46	72.91	39.30	30.70	24.80	20.10	17.50	14.10	12.00	6.24
1.75V	357.42	260.7	208.4	168.02	128.57	95.91	76.24	40.80	31.20	25.40	20.60	18.00	14.30	12.10	6.30
1.70V	393.64	284.2	222.5	176.52	133.86	99.70	78.66	42.40	32.10	26.10	21.20	18.40	14.50	12.20	6.42
1.65V	434.01	306.7	236.6	187.60	141.22	102.24	81.30	43.60	33.50	27.00	21.80	18.80	14.70	12.50	6.50
1.60V	478.74	332.9	253.0	199.80	149.04	106.49	84.18	45.10	34.50	27.80	22.50	19.20	14.90	12.60	6.54

**CONSTANT POWER DISCHARGE (Watts/Cell) at 77° F (25° C)**

Final Voltage	5 min	10 min	15 min	20 min	30 min	45 min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85V	431.82	343.0	294.6	249.0	200.1	152.72	125.46	70.0	55.5	45.5	36.8	32.1	26.2	22.4	12.2
1.80V	573.51	433.1	351.2	290.0	232.5	176.20	139.84	75.9	59.4	48.3	39.3	34.3	27.7	23.7	12.3
1.75V	632.84	468.3	378.9	309.0	239.3	181.10	145.59	78.4	60.3	49.2	40.2	35.1	28.1	23.9	12.4
1.70V	677.58	498.9	398.9	322.2	247.7	187.70	149.73	81.3	61.9	50.4	41.1	35.8	28.5	24.1	12.7
1.65V	736.57	533.4	420.9	339.8	259.2	190.70	153.64	83.1	64.2	52.0	42.1	36.5	28.8	24.6	12.8
1.60V	793.62	565.9	442.7	358.0	271.7	197.60	158.20	85.5	65.9	53.4	43.4	37.2	29.1	24.8	12.9

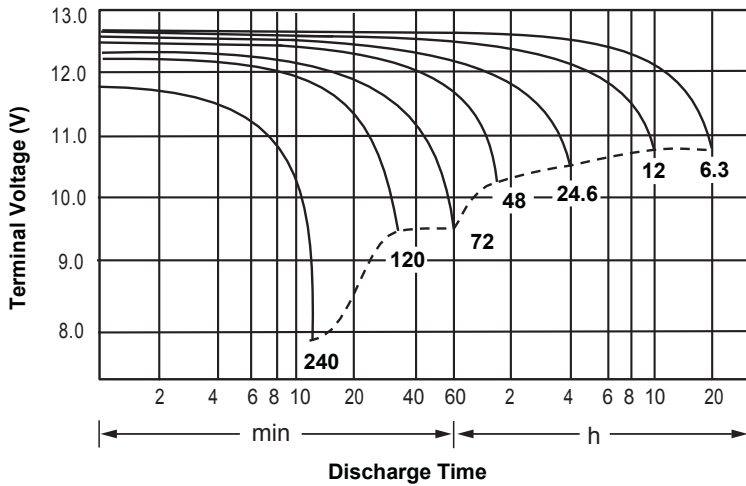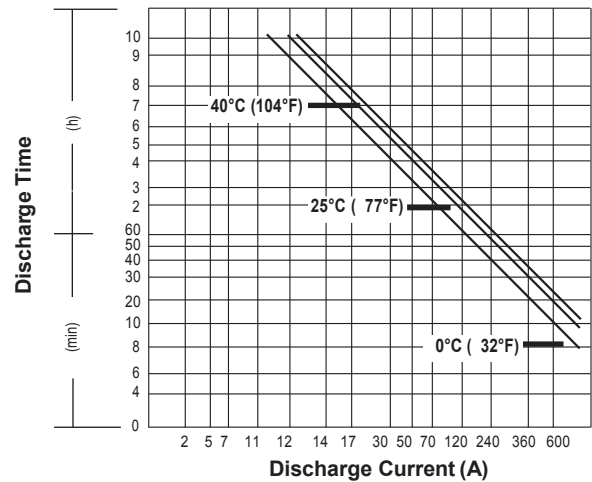**Discharge Characteristics**

**Discharge Time vs. Discharge Current**

**Charging**


**Cycle Applications:** Limit initial current to 36.0A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68° F (20° C). Hold at 14.4 to 14.7 volts until current drops to under 1.20A. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

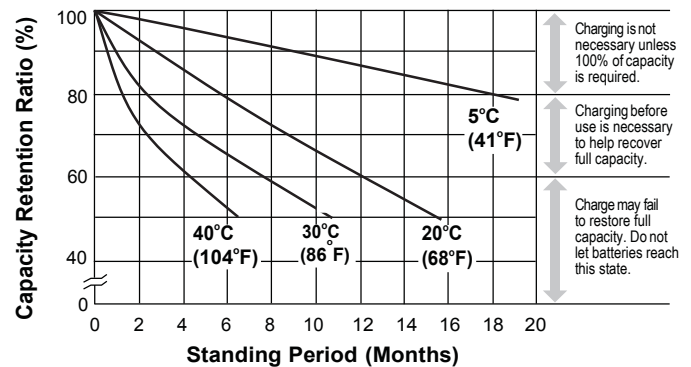**Shelf Life & Storage**

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**


**DOMESTIC SALES**  
Tel: (07) 3386 1102  
Fax: (07) 3102 9913  
[sales@spb.net.au](mailto:sales@spb.net.au)

[www.sealedperformance.com.au](http://www.sealedperformance.com.au)  
1 Ant Road, Yatala  
Brisbane QLD 4207

